

WAAS CH 82215 W28A	APP CRS 277°	Rwy Idg 4972 TDZE 1134 Apt Elev 1136
--	------------------------	---


RNAV (GPS) RWY 28

WAYNE COUNTY (BJJ)

Baro-VNAV NA when using Akron-Canton Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Akron-Canton Rgnl altimeter setting: increase LPV DA to 1458 feet, LNAV/VNAV DA to 1649 feet, and visibility LPV all Cats ¼ SM and LNAV/VNAV all Cats ½ SM; increase all MDA 60 feet and visibility LNAV Cat C/D ½ SM and Circling Cat C/D ¼ SM.

MISSED APPROACH:
Climb to 3000 direct JAVNE and hold.

ASOS 118.075	CLEVELAND APP CON ★ 125.5 371.875	CLNC DEL 121.75	UNICOM 122.975 (CTAF) 0
------------------------	---	---------------------------	-----------------------------------

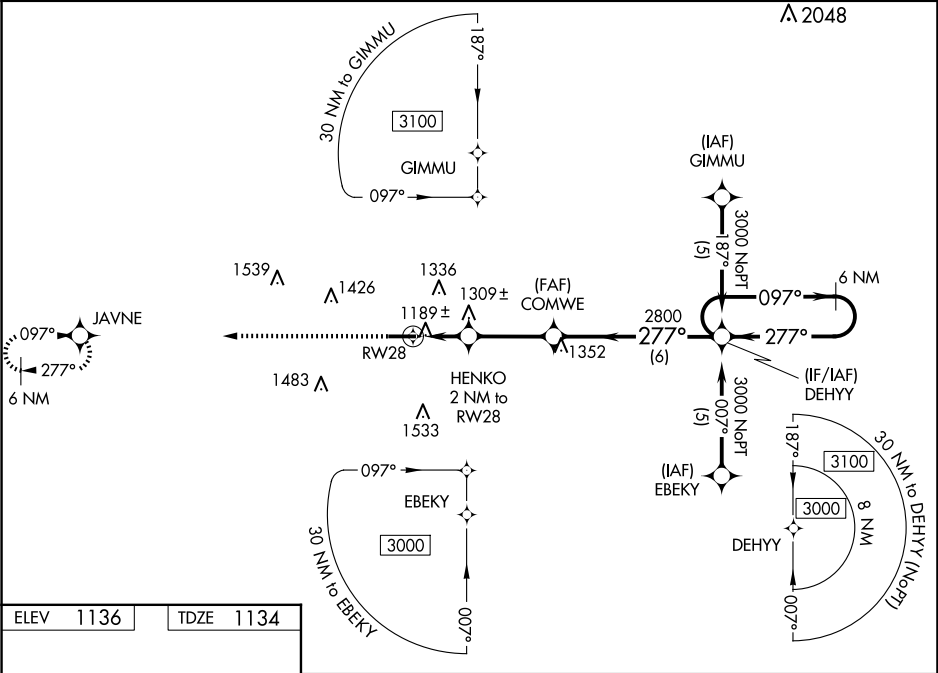

ELEV 1136	TDZE 1134	3000 JAVNE ↑ *LNAV only				VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 33).				6 NM Holding Pattern			
RW28		HENKO 2 NM to RW28		COMWE		DEHY		3000		GP 3.00° TCH 35			
2 NM		3.1 NM		6 NM									
CATEGORY		A		B		C		D					
LPV DA		1398-1		264 (300-1)									
LNAV/ VNAV DA		1589-1½		455 (500-1½)									
LNAV MDA		1560-1		426 (500-1)		1560-1¼		426 (500-1¼)					
CIRCLING		1600-1 464 (500-1)		1700-1 564 (600-1)		1800-1¾ 664 (700-1¾)		1840-2¼ 704 (800-2¼)					