


WAAS CH 58220 W26A	APP CRS 257°	Rwy Idg TDZE 1260 Apt Elev 1277
--	------------------------	---

RNAV (GPS) RWY 26
CENTRAL WISCONSIN (CWA)

RNP APCH - GPS.	MISSED APPROACH: Climb to 3000 direct PLEAD and hold.
For uncompensated Baro-VNAV systems LNAV/VNAV NA below -17°C or above 54°C.	

ATIS 127.45	MINNEAPOLIS CENTER 124.4 317.7	CWA TOWER★ 119.75 (CTAF) 360.7	GND CON 121.9 360.7	UNICOM 122.95
-----------------------	--	--	-------------------------------	-------------------------

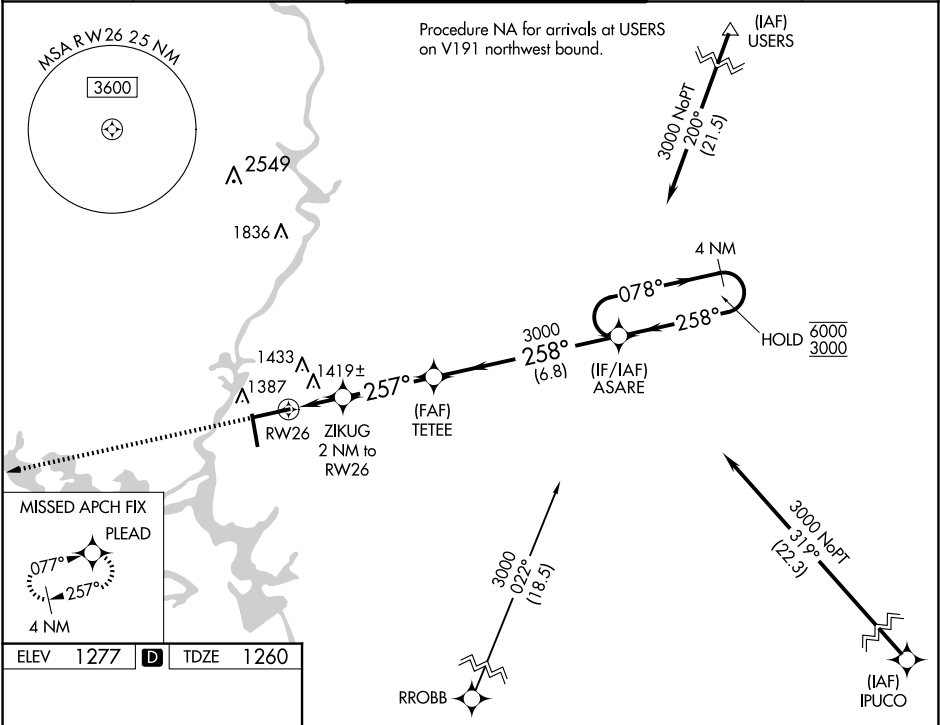

ELEV 1277	TDZE 1260	3000 PLEAD	TETEE	ASARE	4 NM Holding Pattern
1347 TWR 1355	7723 X 150	1.2 NM to RWY 26	3000	258°	078° 6000
0.8 NM UP	35	0.8 NM	1940	258°	258° 3000
REIL Rwy 17 and 26	HIRL Rwy 8-26 and 17-35	1.2 NM	0.8 NM	3.3 NM	6.8 NM
GP 3.00° TCH 45					
CATEGORY	A	B	C	D	
LPV DA	1460-3/4	200 (200-3/4)			
LNAV/VNAV DA	1680-1 1/8	420 (500-1 1/8)			
LNAV MDA	1680-1	420 (500-1)	1680-1 1/8	420 (500-1 1/8)	
CIRCLING	1740-1	463 (500-1)	1740-1 1/2	1840-2	563 (600-2)

EC-3, 02 OCT 2025 to 30 OCT 2025

EC-3, 02 OCT 2025 to 30 OCT 2025