

DESTIN, FLORIDA

AL-5680 (FAA)

25107



WAAS CH 48923 W14A	APP CRS 143°	Rwy Idg 5001 TDZE 22 Apt Elev 22
--	------------------------	---

RNAV (GPS) RWY 14
DESTIN EXEC (DTS)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 54°C (130°F).
Baro-VNAV and VDP NA when using Crestview altimeter setting. Rwy 14 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Crestview altimeter setting and increase all DA/MDA 80 feet; increase LPV all Cats visibility ½ SM, LNAV/VNAV all Cats visibility ¾ SM, increase LNAV Cats C and D ½ SM, and Circling Cats C and D ¼ SM.

MISSED APPROACH:
Climb to 2000 direct
AJUP and hold.

ATIS 133.925	EGLN APP CON 132.1 360.6	DESTIN TOWER ★ 118.45 (CTAF) 0	GND CON 121.6	CLNC DEL 121.6 377.2	CLNC DEL 127.7 (When twr closed)
------------------------	------------------------------------	--	-------------------------	--------------------------------	---

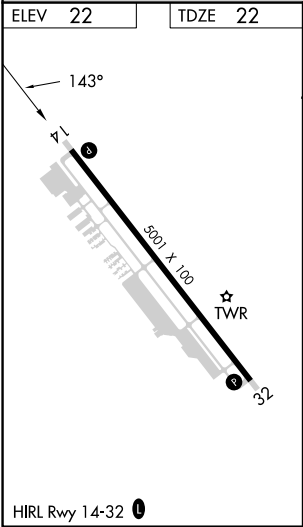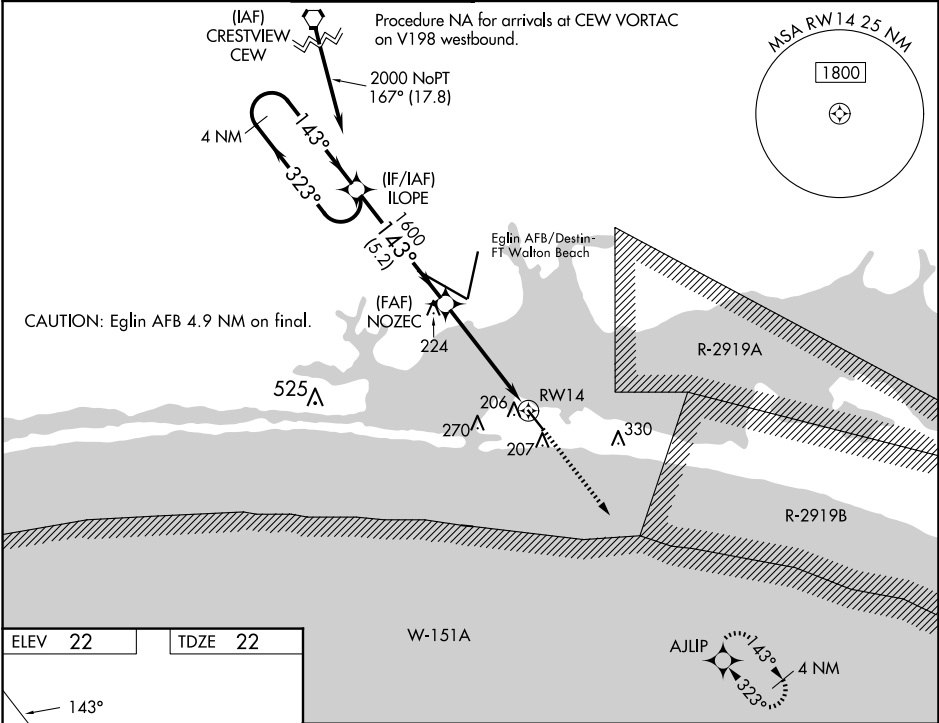

4 NM Holding Pattern ← 323° 143° → 2000 GP 3.00° TCH 43				ILOPE NOZEC 1600 1600 5.2 NM 3.6 NM 1.2 NM				2000 ↑		AJLIP ✦	
								* LNAV only.			
								* 1.2 NM to RW14			
								RW14			
CATEGORY		A		B		C		D			
LPV DA				272-1		250 (300-1)					
LNAV/VNAV DA				367-1½		345 (400-1½)					
LNAV MDA		460-1 438 (500-1)				460-1¼ 438 (500-1¼)					
CIRCLING		580-1 558 (600-1)				680-1¾ 658 (700-1¾)				680-2 658 (700-2)	

DESTIN, FLORIDA
Amdt 2C 07DEC17

30°24'N-86°28'W

DESTIN EXEC (DTS)
RNAV (GPS) RWY 14

SE-3, 02 OCT 2025 to 30 OCT 2025

SE-3, 02 OCT 2025 to 30 OCT 2025