

WAAS CH 53604 W36A	APP CRS 360°	Rwy Idg TDZE Apt Elev	5550 326 333
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 36
GEORGE M BRYAN (STF)



RNP APCH-GPS.

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C or above 54°C .
When local altimeter setting not received, use Golden Triangle Rgnl altimeter setting and increase LPV DA to 566 feet; increase LNAV/VNAV DA to 690 feet; increase all MDAs 40 feet and LNAV visibility Cat C/D ⅓ SM, and Circling visibility Cat C ¼ SM.
Baro-VNAV and VDP NA when using Golden Triangle Rgnl altimeter setting.

MISSED APPROACH: Climb to 3400 direct FESBO and hold, continue climb-in-hold to 3400.

AWOS-3PT 118.975	COLUMBUS APP CON★ 135.6 323.275	CLNC DEL 126.25	UNICOM 122.7 (CTAF)
----------------------------	---	---------------------------	-------------------------------

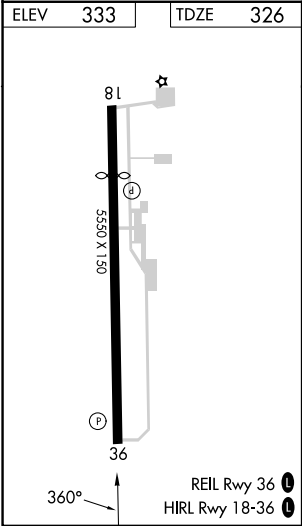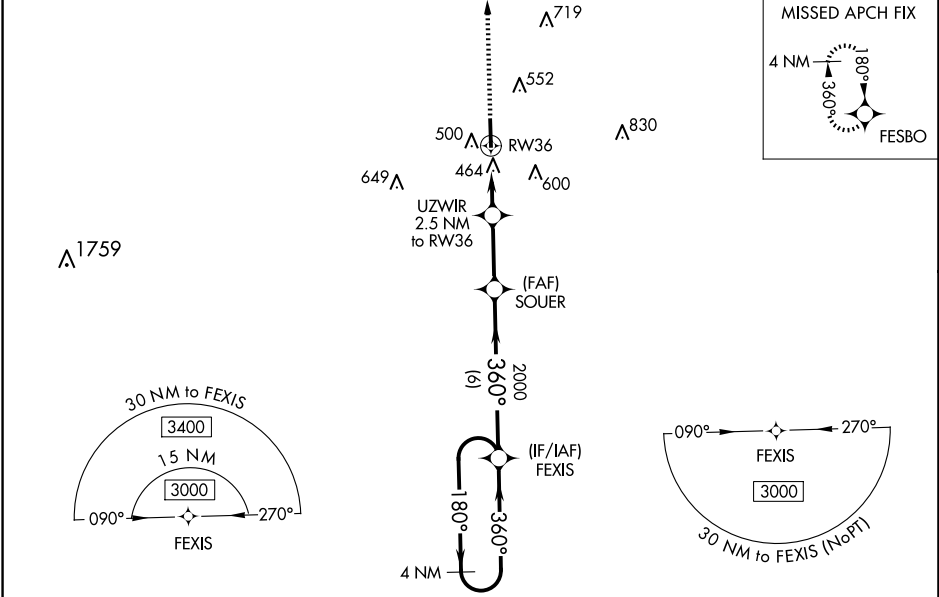

3400				
*LNAV only.		UZWIR 2.5 NM to RW36 SOUER 2000 FEXIS 4 NM Holding Pattern 180° → ← 360° 3000 GP 3.00° TCH 40		
RW36 *1.1 NM to RW36 1.1 NM 1.4 NM 2.7 NM 6 NM		*1140 2000		
CATEGORY	A	B	C	D
LPV DA	526-¾		200 (200-¾)	
LNAV/VNAV DA	650-1		324 (400-1)	
LNAV MDA	720-1 394 (400-1)		720-1½ 394 (400-½)	
CIRCLING	920-1 587 (600-1)		920-1½ 1020-2¼ 587 (600-1½) 687 (700-2¼)	

SC-4, 02 OCT 2025 to 30 OCT 2025

SC-4, 02 OCT 2025 to 30 OCT 2025