WAAS CH 58035 W09A	APP CRS 095°	Rwy ldg 10499 TDZE 13 Apt Elev 13

RNAV (GPS) RWY 9

DADE-COLLIER TRAINING AND TRANSITION (TNT)

NA Baro-VNAV NA when using Miami Executive altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Rwy 9 helicopter visibility reduction below 1 SM NA. DME/DME RNP-0.3 NA. Procedure NA at night. When local altimeter setting not received, use Miami Executive altimeter setting and increase LPV DA to 279 feet; increase LNAV/VNAV DA to 346; and increase all MDA 80 feet; increase LNAV Cats C and D visibility ¼ SM.

MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 direct BRBRA and hold.

AWOS-3	MIAMI APP CON	UNICOM
119.075	128.6 306.975	123.0 (CTAF)

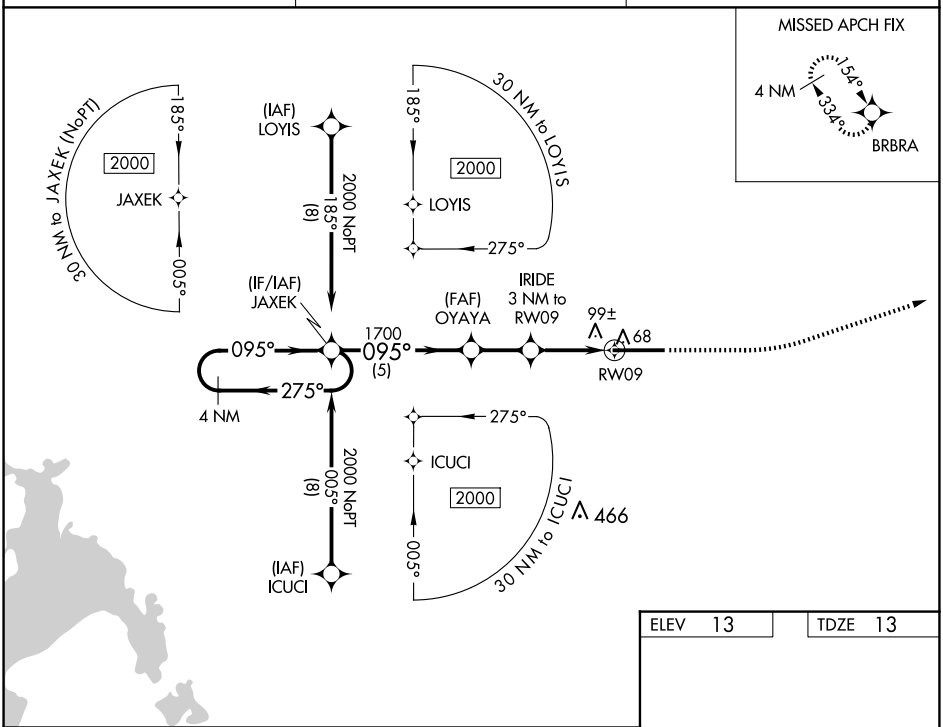

ELEV 13	TDZE 13

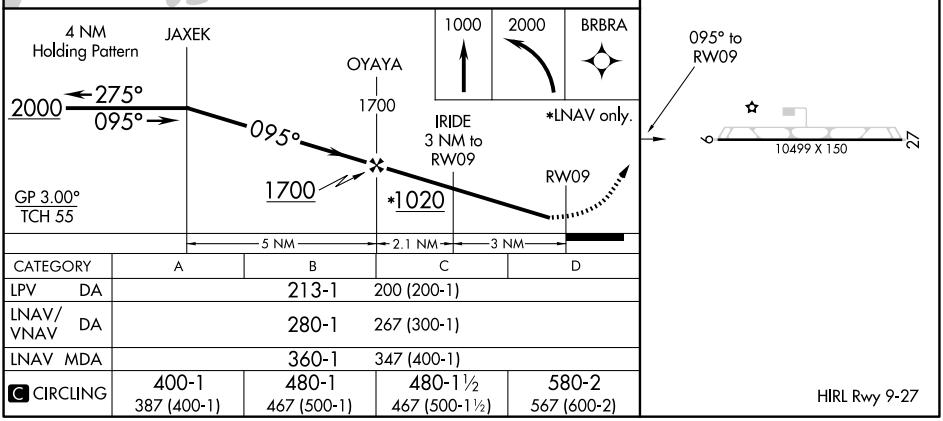

CATEGORY	A	B	C	D
LPV DA	213-1		200 (200-1)	
LNAV/VNAV DA	280-1		267 (300-1)	
LNAV MDA	360-1		347 (400-1)	
C CIRCLING	400-1 387 (400-1)	480-1 467 (500-1)	480-1½ 467 (500-1½)	580-2 567 (600-2)

HIRL Rwy 9-27

SE-3, 02 OCT 2025 to 30 OCT 2025

SE-3, 02 OCT 2025 to 30 OCT 2025