

APP CRS
345°

Rwy Ldg
TDZE
246

Apt Elev
246

RNAV (GPS) RWY 35

BARNWELL RGNL (BNL)

RNP APCH - GPS.


▼

▲ NA

VDP NA when using AGS altimeter setting. When local altimeter setting not received, use AGS altimeter setting and increase all MDAs 100 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ½ SM. Circling Rwy 5, 23 NA at night.

MISSED APPROACH: Climb to 2200 direct FATSU and hold.

AWOS-3PT 119.775	JACKSONVILLE CENTER 132.925 363.2	GCO 121.725	UNICOM 122.8 (CTAF) 0
----------------------------	---	-----------------------	---------------------------------

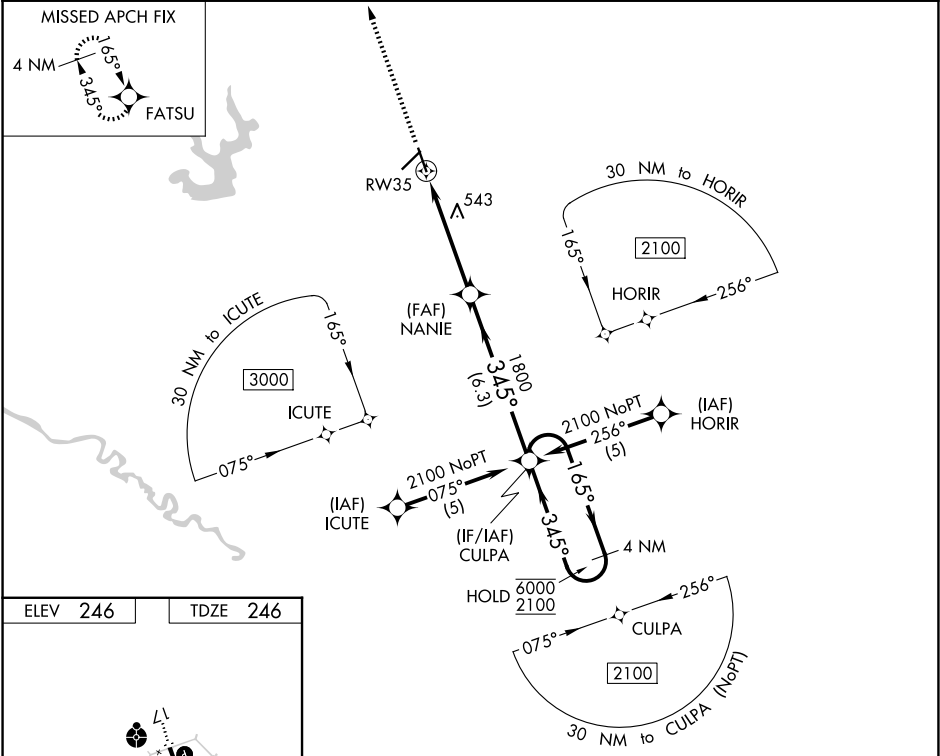

ELEV 246

TDZE 246

MIRL Rwy 17-35 0

41

32

5

35

45° X 70

5119-1.00

345°

2200	FATSU	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 45).			
		CULPA 4 NM Holding Pattern			
		NANIE			
		RW35			
		1.8 NM to RW35			
		3.04° TCH 42			
		1.8 2.9 NM 6.3 NM			
CATEGORY	A	B	C	D	
LNAV MDA	860-1 614 (700-1)		860-1¾ 614 (700-1¾)	860-2 614 (700-2)	
CIRCLING	860-1 614 (700-1)		900-1¾ 654 (700-1¾)	900-2 654 (700-2)	

SE-2, 02 OCT 2025 to 30 OCT 2025

SE-2, 02 OCT 2025 to 30 OCT 2025