

WAAS CH 78038 W04A	APP CRS 046°	Rwy Idg TDZE 420 Apt Elev 421
--	------------------------	---

RNAV (GPS) RWY 4

HUMBOLDT MUNI (M53)

RNP APCH - GPS.


NA

Rwy 4 helicopter visibility reduction below 1 SM NA. Use Jackson altimeter setting, when not received, use Dyersburg altimeter setting: increase all MDA 60 feet; increase LP Cats C/D visibility 1/8 mile; increase LNAV Cats C/D and Circling Cats C/D visibility 1/4 mile. Straight-in Rwy 4 NA at night, Circling Rwy 4 NA at night.

MISSED APPROACH:

Climb to 3000 direct FASKA and hold.

MKL ASOS 119.325	MEMPHIS CENTER 134.65 316.15	UNICOM 122.8 (CTAF)
----------------------------	--	-------------------------------

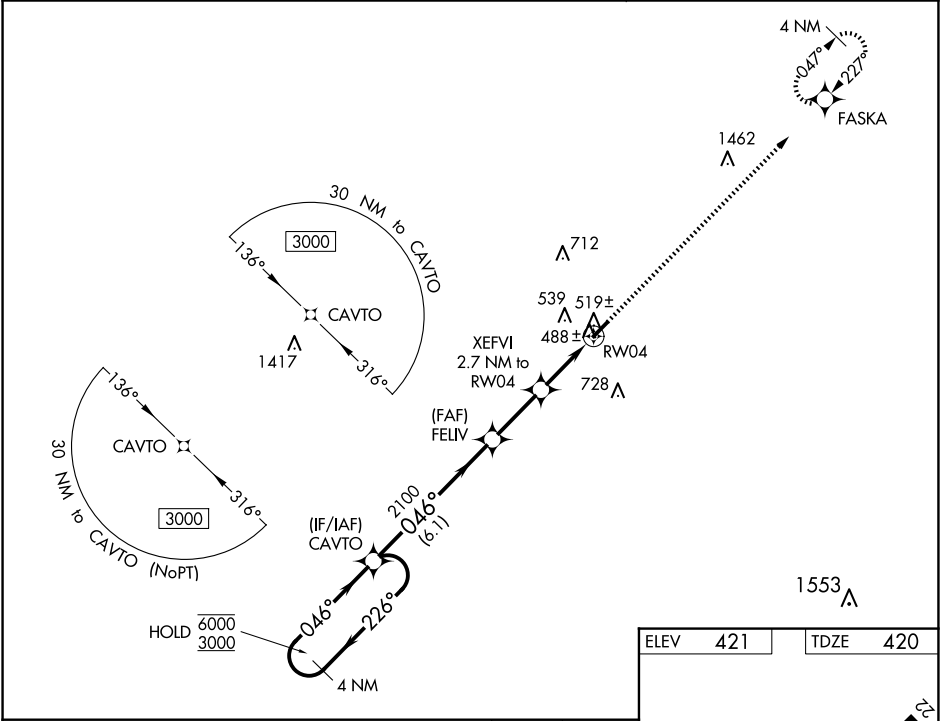

4 NM Holding Pattern

Visual Segment - Obstacles.

3000

FASKA

CAVTO

6000 ← 226°

3000 → 046°

046°

FELIV

2100

XEFVI 2.7 NM to RWY 04

1300

RWY 04

6.1 NM

2.5 NM

2.7 NM

CATEGORY	A	B	C	D
LP MDA	780-1 360 (400-1)			
LNAV MDA	800-1 380 (400-1)			
CIRCLING	900-1 479 (500-1)	920-1 499 (500-1)	1120-2 699 (700-2)	1120-2 1/4 699 (700-2 1/4)

