

BARTOW, FLORIDA

AL-5838 (FAA)

23278

WAAS CH 58112 W05A	APP CRS 050°	Rwy Idg 5001 TDZE 123 Apt Elev 125
--	------------------------	---

RNAV (GPS) RWY 5


BARTOW EXEC (BOW)

RNP APCH.

- ▼** Rwy 5 helicopter visibility reduction below $\frac{3}{4}$ SM NA. When local altimeter setting not received, use Tampa Intl altimeter setting and increase LPV DA to 553 feet, LNAV/VNAV DA to 684 feet and all MDA 120 feet, increase LNAV Cat C visibility $\frac{1}{4}$ SM, Cat D $\frac{1}{2}$ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. VDP and Baro-VNAV NA when using Tampa Intl altimeter setting.

MISSED APPROACH:
Climb to 2300 direct
ZOMOV and hold.

AWOS-3 123.775	TAMPA APP CON 120.65 290.3	BARTOW TOWER ★ 121.2 0 (CTAF)	GND CON 121.9	UNICOM 122.95
--------------------------	--------------------------------------	---	-------------------------	-------------------------

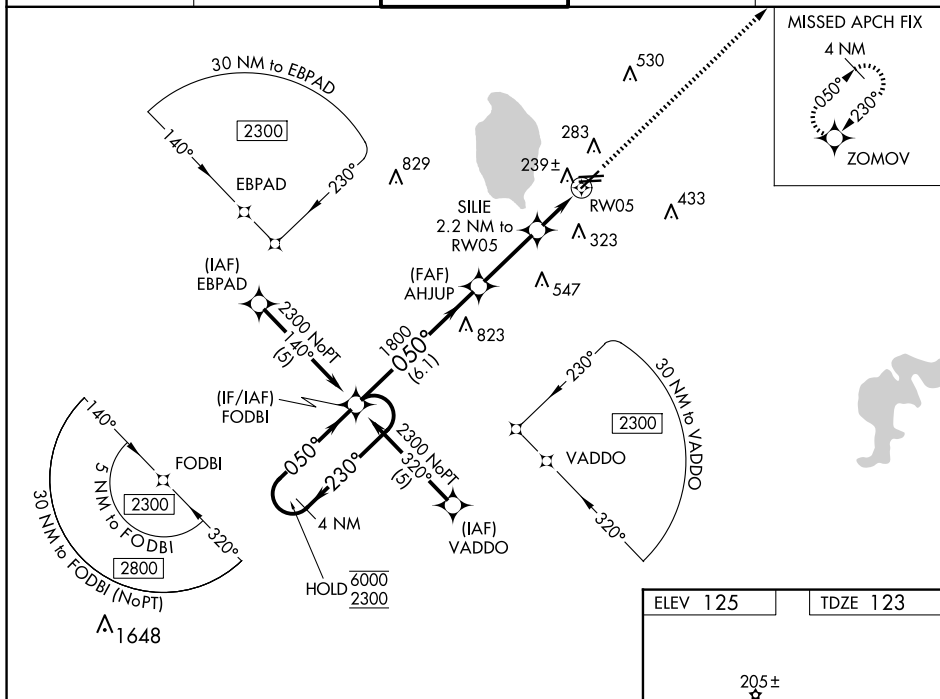

4 NM Holding Pattern

FODBI

AHJUP 1800

SILIE 2.2 NM to RW05

*1 NM to RW05

*840


1800

050°

GP 3.00° TCH 45

VGSI and RNAV glidepath not coincident (VGSI Angle 3.50/TCH 51).

CATEGORY	A	B	C	D
LPV DA	447-1 1/4	324 (400-1 1/4)		
RNAV/VNAV DA	509-1 1/2	386 (400-1 1/2)		
RNAV MDA	520-1	397 (400-1)	520-1 1/8 397 (400-1 1/8)	520-1 1/4 397 (400-1 1/4)

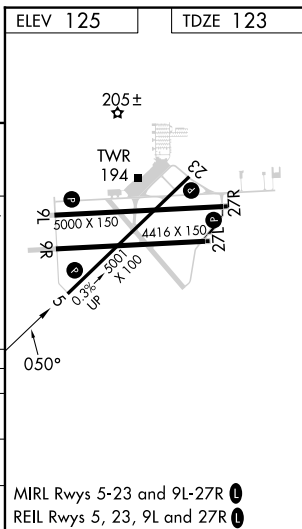

BARTOW, FLORIDA
Orig-D 07NOV19

27°57'N-81°47'W

BARTOW EXEC (BOW)
RNAV (GPS) RWY 5

SE-3, 02 OCT 2025 to 30 OCT 2025