

BARTOW, FLORIDA

AL-5838 (FAA)

23278

WAAS CH 90511 W09A	APP CRS 091°	Rwy Idg 5000 TDZE 125 Apt Elev 125
--	------------------------	---


RNAV (GPS) RWY 9L
BARTOW EXEC(BOW)

RNP APCH.

T Rwy 9L helicopter visibility reduction below $\frac{3}{4}$ SM NA. When local altimeter setting not received, use Tampa Intl altimeter setting and increase LPV DA to 548 feet, LNAV/VNAV DA to 645 feet and all MDA 120 feet, increase LNAV Cat C and D visibility $\frac{1}{4}$ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. VDP and Baro-VNAV NA when using Tampa Intl altimeter setting.

MISSED APPROACH: Climb to 2000 direct IVON and hold.

AWOS-3 123.775	TAMPA APP CON 120.65 290.3	BARTOW TOWER ★ 121.2 0 (CTAF)	GND CON 121.9	UNICOM 122.95
--------------------------	--------------------------------------	---	-------------------------	-------------------------

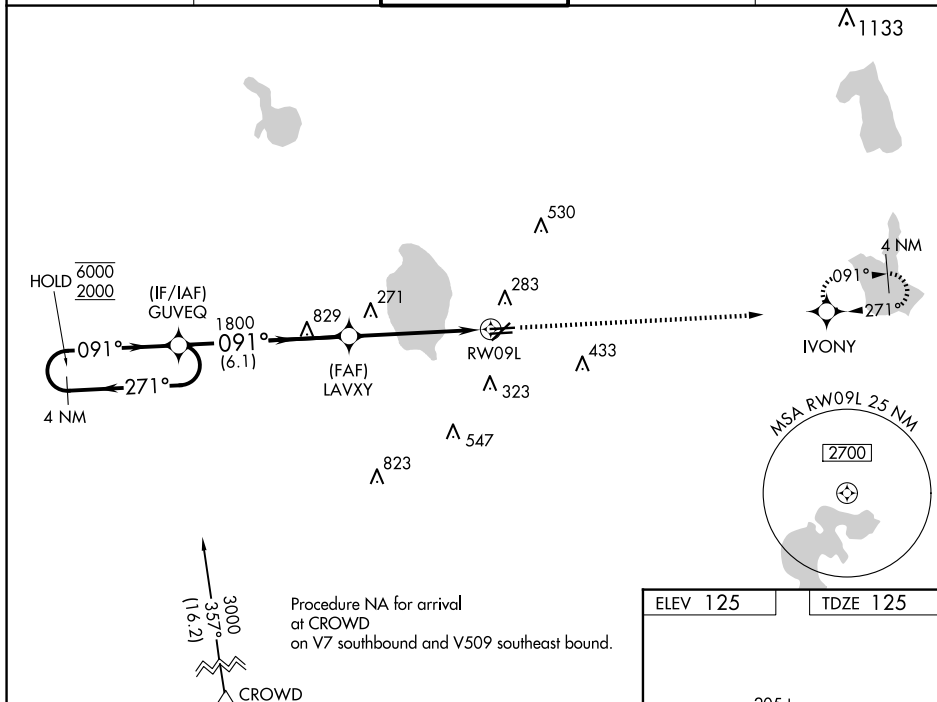


GUYE VORTAC

Holding Pattern: 4 NM
 Altitudes: 6000, 2000
 Bearings: 271° ←, 091° →
 GP 3.00°, TCH 45

Descent Path:
 1800 ft
 091°
 *1.2 NM to RW09L

Missed Approach:
 1.2 NM
 2000 ft
 IVONY
 *LNAV only.

CATEGORY	A	B	C	D
LPV DA		442-1¼	317 (400-1¼)	
LNAV/VNAV DA		539-1½	414 (500-1½)	
LNAV MDA	540-1	415 (500-1)		540-1¼ 415 (500-1¼)

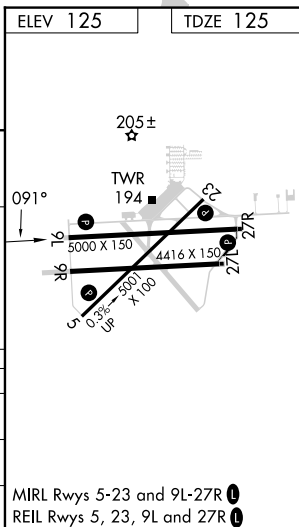

BARTOW, FLORIDA
Amdt 1D 07NOV19

27°57'N-81°47'W

BARTOW EXEC(BOW)
RNAV (GPS) RWY 9L

SE-3, 02 OCT 2025 to 30 OCT 2025