


WAAS CH 77735 W09A	APP CRS 093°	Rwy Idg TDZE 1198 Apt Elev 1198
--	------------------------	---

RNAV (GPS) RWY 9

PORTAGE COUNTY (POV)

RNP APCH - GPS. ▼ Baro-VNAV and VDP NA when using CAK altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Rwy 9 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not recieved, use CAK altimeter setting and increase LPV DA to 1498 feet. Increase LNAV/VNAV DA to 1557 feet. Increase all MDAs 60 feet and LNAV visibility Cat C ¼ SM, and Circling visibility Cat C ¼ SM.	MISSED APPROACH: Climb to 4000 direct WHINR and hold, continue climb-in-hold to 4000.
--	---

AWOS-3 118.675	CLEVELAND APP CON★ 125.5 371.875	CLNC DEL 125.65	UNICOM 123.05 (CTAF) 0
--------------------------	--	---------------------------	---

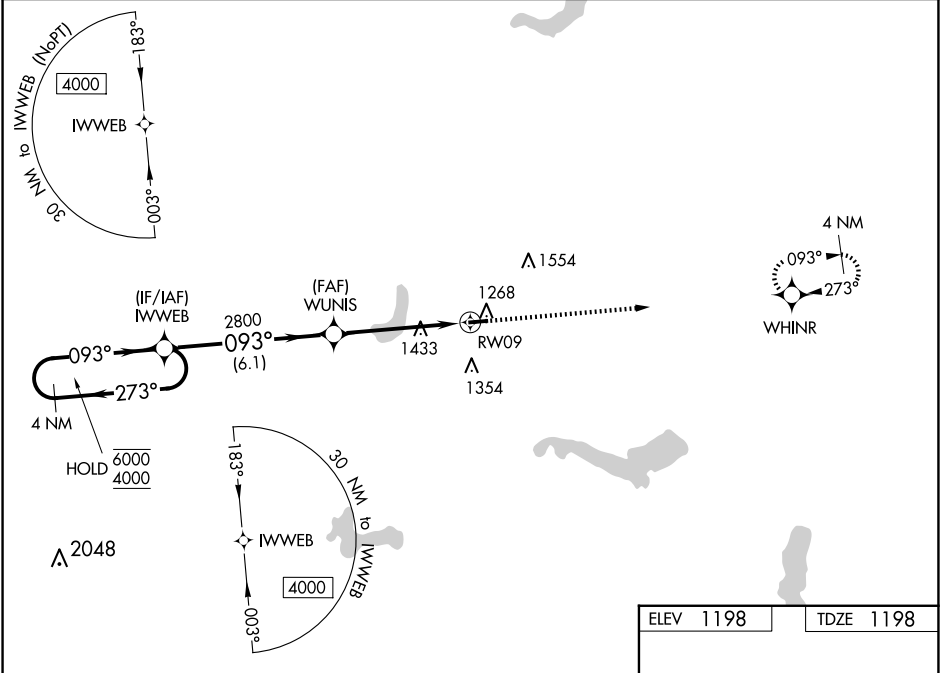

4 NM Holding Pattern		IWWEB		WUNIS		4000 WHINR	
6000 ← 273° 4000 → 093°		093°		2800		1.5 NM to RW09	
GP 3.00° TCH 40		2800		RW09		093°	
6.1 NM		3.5 NM		1.5 NM			
CATEGORY	A	B	C	D			
LPV DA	1 448-1		250 (300-1)		NA		
LNAV/ VNAV DA	1 507-1		309 (400-1)		NA		
LNAV MDA	1700-1	502 (600-1)		1700-1⅞ 502 (600-1⅞)		NA	
CIRCLING	1740-1 542 (600-1)	1800-1 602 (700-1)		1860-1¾ 662 (700-1¾)		NA	
REIL Rwy 9 and 27 MIRL Rwy 9-27							