


WAAS CH 69624 W09A	APP CRS 088°	Rwy Ldg TDZE 2933 Apt Elev 2933
--	------------------------	---

RNAV (GPS) RWY 9

GARRETT COUNTY (2G4)

RNP APCH - GPS.	Rwy 9 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. Baro-VNAV and VDP NA when using MGW altimeter setting. When local altimeter setting not received, use MGW altimeter setting and increase LPV DA to 3483 feet and all visibilities ¾ SM. Increase LNAV/VNAV DA to 3538 feet and all visibilities ¾ SM; increase all MDAs 300 feet and LNAV visibility Cat C ¾ SM, and Circling visibility Cat C 1 SM. MISSED APPROACH: Climb to 5600 direct HABEX and hold, continue climb-in-hold to 5600.
-----------------	--

AWOS-3 120.125	CLARKSBURG APP CON ★ 119.425 284.65	UNICOM 123.0 (CTAF) 0
--------------------------	---	---------------------------------

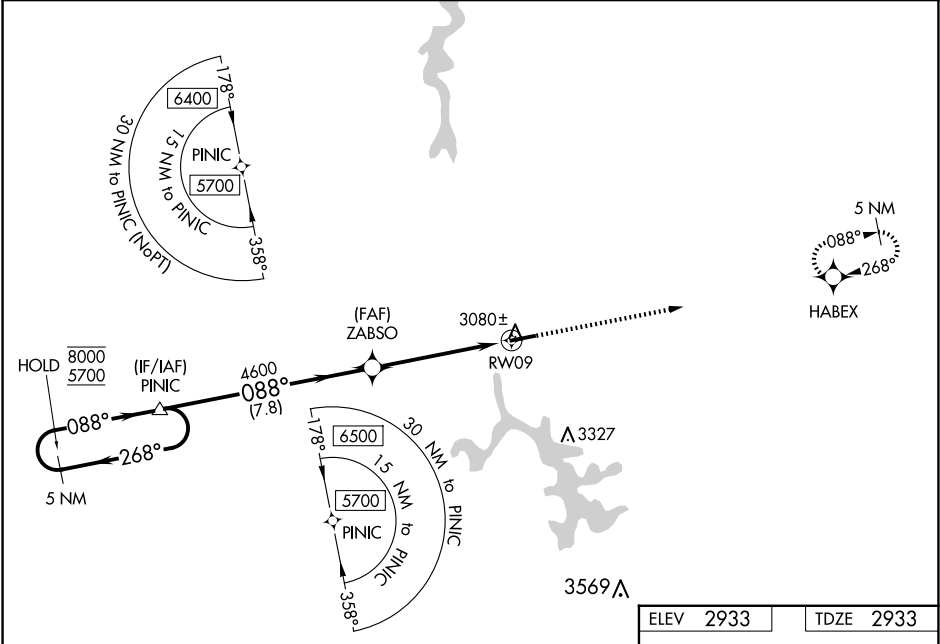

ELEV 2933		TDZE 2933	
5 NM Holding Pattern		5600 HABEX	
GP 3.00 TCH 43		RW09	
CATEGORY		A	
LPV DA		3183-¾ 250 (300-¾)	
LNAV/VNAV DA		3238-⅞ 305 (400-⅞)	
LNAV MDA		3340-1 407 (500-1)	
CIRCLING		3380-1 447 (500-1)	
		3400-1 467 (500-1)	
		3500-1½ 567 (600-1½)	
		NA	

REIL Rwy 9 and 27 0

MIRL Rwy 9-27 0