
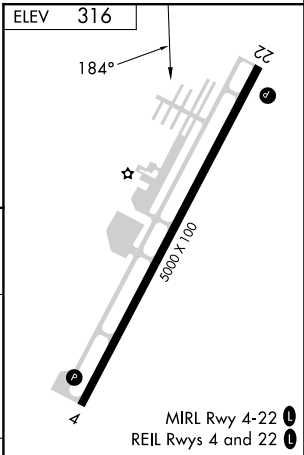
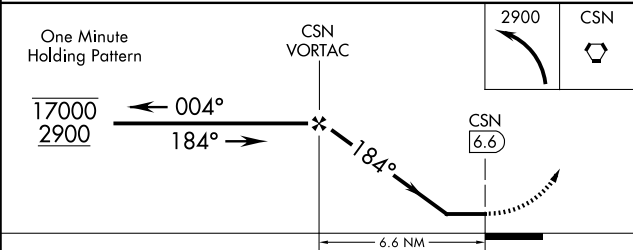


Rwy 4, 22 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use IAD altimeter setting and increase all MDAs 80 feet, Circling Cats C and D visibility ¼ SM.

MISSED APPROACH: Climbing left turn to 2900 direct CSN VORTAC and hold.

AWOS-3 119.325	POTOMAC APP CON 128.525 306.925	CLNC DEL 121.6	UNICOM 123.075 (CTAF) 1
-------------------	------------------------------------	-------------------	-----------------------------------

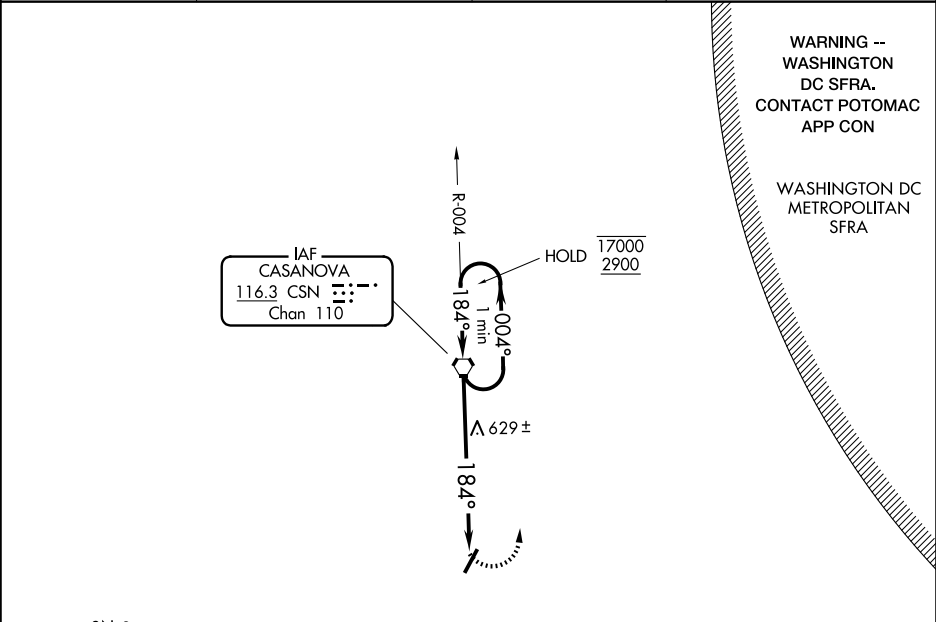

CATEGORY	A	B	C	D	FAF to MAP 6.6 NM					
CIRCLING	920-1	960-1	960-1¾	1100-2½	Knots	60	90	120	150	180
	604 (700-1)	644 (700-1)	644 (700-1¾)	784 (800-2½)	Min:Sec	6:36	4:24	3:18	2:38	2:12

NE-3, 02 OCT 2025 to 30 OCT 2025

NE-3, 02 OCT 2025 to 30 OCT 2025