

APP CRS
240°

Rwly Idg
4002

TDZE
632

Apt Elev
632

RNAV (GPS) RWY 24
HEBER SPRINGS MUNI (HBZ)


RNP APCH

Procedure NA at night. Rwy 24 helicopter visibility reduction below 1 SM NA. Obtain local altimeter setting on CTAF; when not received, use Batesville altimeter setting and increase all MDAs 80 feet, and increase LNAV visibility Cat B ¼ SM, Cat C and D ½ SM. Increase Circling visibility Cat B, C ¼ SM, and Cat D ½ SM.

MISSED APPROACH: Climb to 4000 direct RILVE and hold, continue climb-in-hold to 4000.

MEMPHIS CENTER
126.85 281.55

UNICOM
122.7 (CTAF) 0

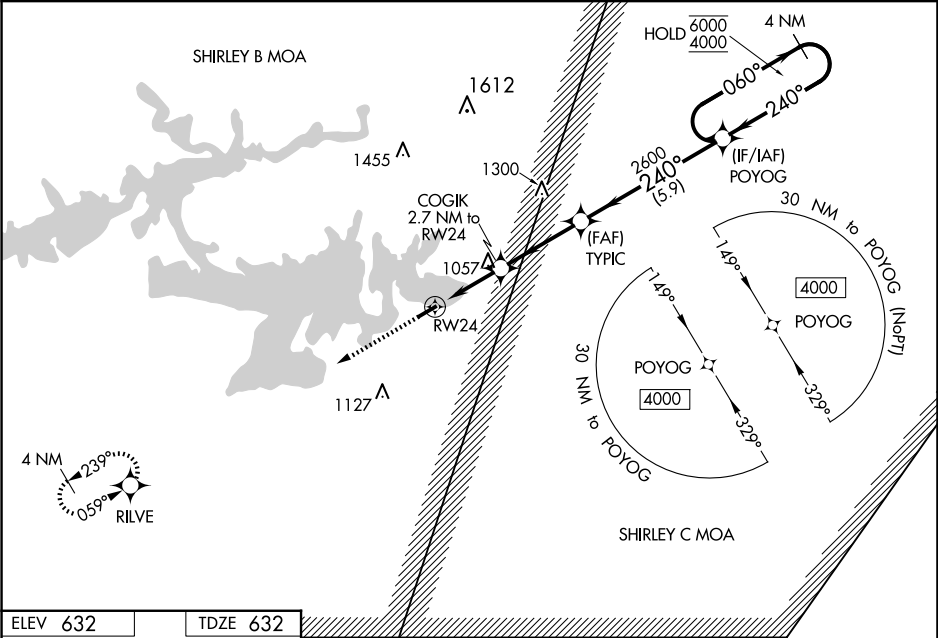

ELEV **632**

TDZE **632**

4000

RILVE

COGIK
2.7 NM to
RW24

TYPIC

POYOG

4 NM
Holding Pattern

240° to
RW24

0.5% UP

4002 X 75

3.00°
TCH 39

2600

1540

240°

060°

6000

4000

2.7 NM

3.4 NM

5.9 NM

4 NM

CATEGORY	A	B	C	D
LNAV MDA	1320-1	688 (700-1)	1320-2	688 (700-2)
CIRCLING	1320-1 688 (700-1)	1380-1 748 (800-1)	1380-2¼ 748 (800-2¼)	1440-2½ 808 (900-2½)

MIRL Rwy 6-24 0

REIL Rws 6 and 24 0