

WAAS CH 50319 W27A	APP CRS 271°	Rwy Idg TDZE 13 Apt Elev 13
--	------------------------	---


RNAV (GPS) RWY 27

FORT LAUDERDALE EXEC (FXXE)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 4°C (40°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Fort Lauderdale/Hollywood Intl altimeter setting and increase LPV DA to 414; LNAV/VNAV DA to 468. Increase all MDA 20 feet and increase LPV all Cats and LNAV Cats C/D visibility to 1 3/8. Baro-VNAV and VDP NA when using Fort Lauderdale/Hollywood Intl altimeter setting. Helicopter visibility reduction below 3/4 SM NA.

MISSED APPROACH:
Climb to 2000 direct
ENVER and hold.

ATIS 119.85	MIAMI APP CON 119.7 306.3	EXECUTIVE TOWER 120.9 239.3	GND CON 121.75	CLNC DEL 127.95
-----------------------	-------------------------------------	---------------------------------------	--------------------------	---------------------------

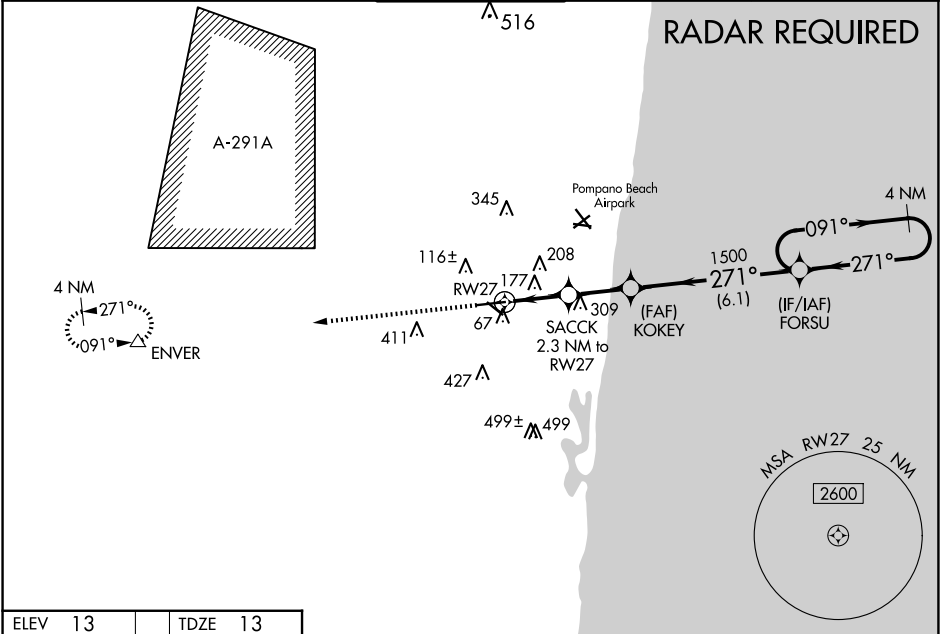

ELEV 13 TDZE 13

2000 ENVER

VGSI and RNAV glidepath not coincident (VGSI Angle 3.25/TCH 56).

*LNAV only

RW27 1.1 1.2 NM 2.2 NM 6.1 NM

SACCK 2.3 NM to RW27

KOKEY 1500

FORSU 4 NM Holding Pattern

091° 2000 271°

780* 1500

GP 3.00° TCH 45

CATEGORY	A	B	C	D
LPV DA	396-1 383 (400-1 1/4)			
LNAV/VNAV DA	450-1 437 (500-1 1/2)			
LNAV MDA	440-1 427 (500-1)		440-1 427 (500-1 1/4)	
CIRCLING	520-1 507 (600-1)	620-1 607 (700-1)	780-2 767 (800-2 1/4)	780-2 767 (800-2 1/2)

HIRL Rwy 9-27

MIRL Rwy 13-31

REIL Rwy 13, 27 and 31