

WAAS CH 70536 W25A	APP CRS 255°	Rwy Idg TDZE 1065 Apt Elev 1067	4001
--	------------------------	---	-------------

RNAV (GPS) RWY 25

ELKIN MUNI (ZEF)


▼

Obtain local altimeter setting on CTAF; when not received, use Mount Airy altimeter setting and increase MDA 80 ft and LP and Circling Cats C/D visibility ¼ mile. DME/DME RNP-0.3 NA. Procedure NA at night. Helicopter visibility reduction below 1 SM NA.

MISSED APPROACH:

Climb to 4900 direct ZOVMI and hold, continue climb-in-hold to 4900.

ATLANTA CENTER 125.15 263.0	UNICOM 123.05(CTAF) 0
---------------------------------------	---------------------------------

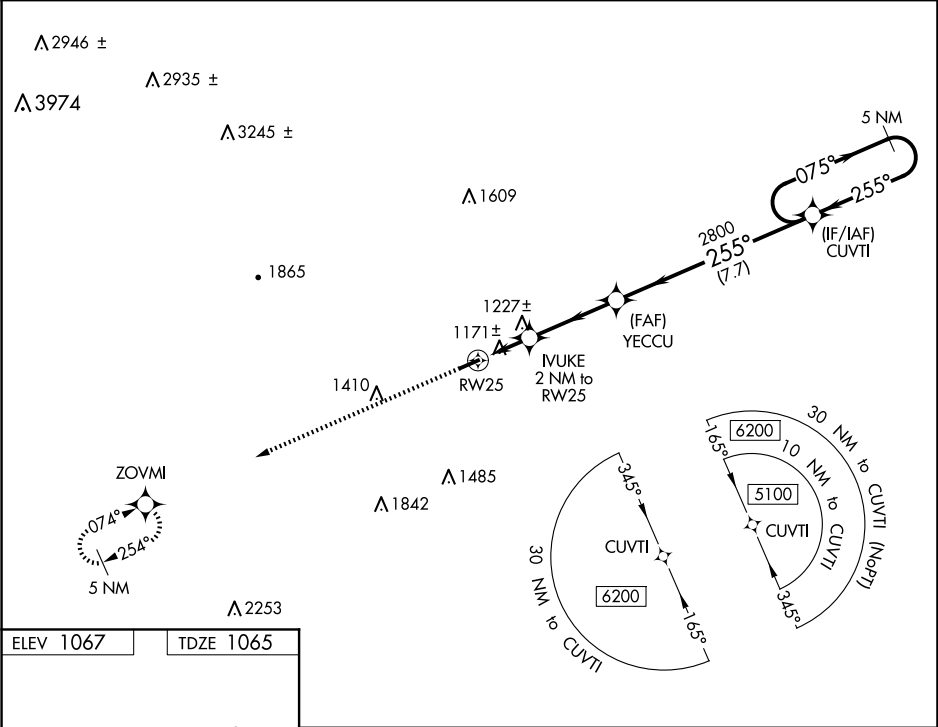

ELEV 1067

TDZE 1065

255° to RW25

0.8% UP

4001 X 75

MIRL Rwy 7-25 0

REIL Rwy 7 and Rwy 25 0

4900 ZOVMI		Visual Segment - Obstacles.		CUVTI 5 NM Holding Pattern	
RW25		IVUKE 2 NM to RW25		YECCU 2800	
1720		2 NM		3.4 NM	
7.7 NM		C		D	
CATEGORY	A	B	C	D	
LP MDA	1 440-1	375 (400-1)	1 440-1½	375 (400-1½)	
LNNAV MDA	1 480-1	415 (500-1)	1 480-1¾	415 (500-1¾)	
CIRCLING	1 540-1 473 (500-1)	1 600-1 533 (600-1)	1 680-1¾ 613 (700-1¾)	1 840-2½ 773 (800-2½)	