

LOC/DME I-OPP

109.7

Chan 34

APP CRS

159°

Rwy Idg

5402

TDZE

207

Apt Elev

207

LOC RWY 16

HANOVER COUNTY MUNI (OFP)



▼

▲

Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Richmond Init altimeter setting and increase all MDAs 40 feet; increase LUKCI fix minimums S-16 Cat C visibility ½ SM.

MISSED APPROACH: Climb to 700 then climbing left turn to 2000 via RIC VORTAC R-345 to COATT INT and hold.

ASOS 119.025	POTOMAC APP CON (001°-185°) 126.4 307.2 (186°-360°) 126.75 307.2	CLNC DEL 125.4	UNICOM 122.7 (CTAF) 0
-----------------	--	-------------------	--------------------------

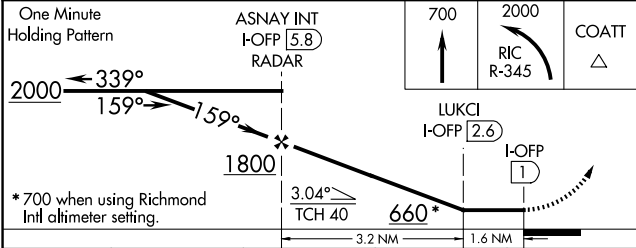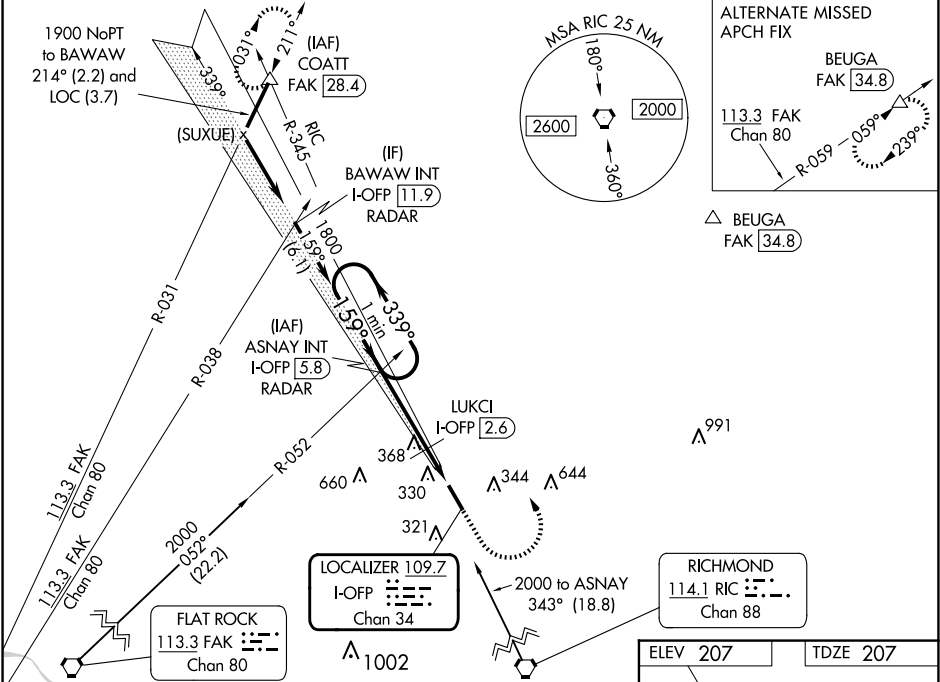

CATEGORY	A	B	C	D
S-16	660-1 453 (500-1)	660-1 453 (500-1)	660-1 453 (500-1)	660-1 453 (500-1)
CIRCLING	660-1 453 (500-1)	660-1 453 (500-1)	660-1 453 (500-1)	660-1 453 (500-1)
LUKCI FIX MINIMUMS				
S-16	560-1 353 (400-1)	560-1 353 (400-1)	560-1 353 (400-1)	560-1 353 (400-1)
CIRCLING	660-1 453 (500-1)	660-1 453 (500-1)	660-1 453 (500-1)	660-1 453 (500-1)

