

LOC/DME I-RLD	APP CRS	Rwy Ldg	4009
110.5	189°	TDZE	390
Chan 42		Apt Elev	394

LOC RWY 19



RICHLAND (RLD)

VDP NA when using PSC altimeter setting. For inop ALS, increase S-19 Cats C and D visibility to 3 SM. When local altimeter setting not received, use PSC altimeter setting and increase all MDAs 20 feet and increase HOTUX fix minimums S-LOC 19 visibility Cat C/D ½ SM, and Circling visibility Cat C ¼ SM. HOTUX fix minimum: For inop ALS, increase S-19 Cats C and D visibility to 1 ½ SM.

MALS

MISSED APPROACH: Climbing right turn to 4000 on heading 045° and on PSC VOR/DME R-337 to BAKCA INT/I-RLD 13.7 DME and hold, continue climb-in-hold to 4000.

AWOS-3PT	SPOKANE APP CON ★	CLNC DEL	UNICOM
132.675	128.75 377.2	122.4	122.7 (CTAF) 0

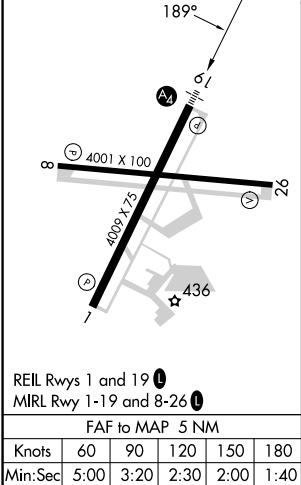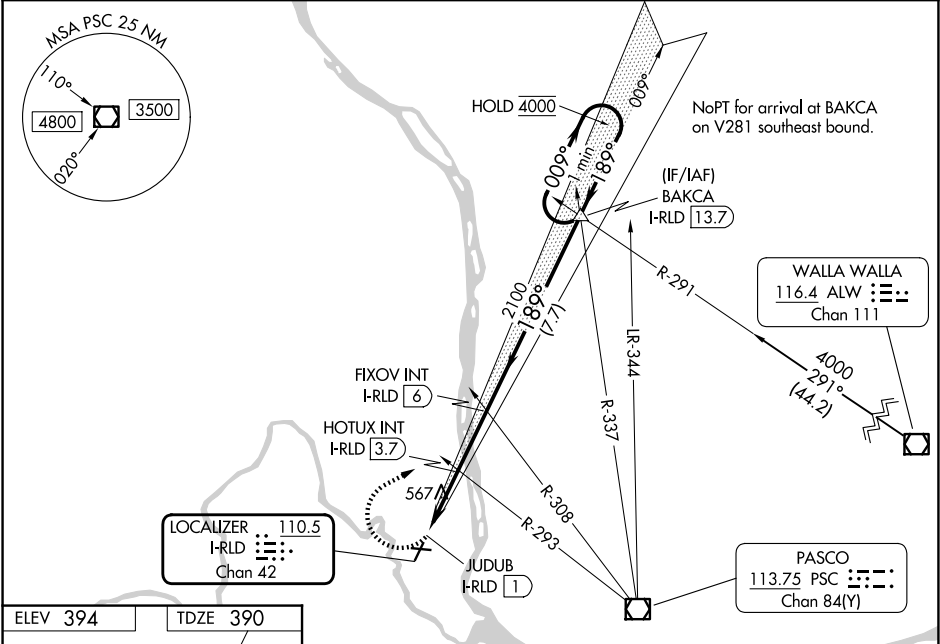

4000		BAKCA	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 30).		BAKCA
PSC R-337		△	FIXOV INT I-RLD 6		I-RLD 13.7
hdg 045°			HOTUX INT I-RLD 3.7		One Minute Holding Pattern
JUDUB I-RLD 1			TCH 40		
0.3 NM		1.2 NM	1.5 NM	2.3 NM	7.7 NM
CATEGORY	A	B	C	D	
S-19	1360-1 970 (1000-1)	1360-1¼ 970 (1000-1¼)	1360-2½ 970 (1000-2½)	1960-3 1566 (1600-3)	
CIRCLING	1360-1¼ 966 (1000-1¼)	1360-1½ 966 (1000-1½)	1360-3 966 (1000-3)	1960-3 1566 (1600-3)	
HOTUX FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)					
S-19	880-7⁄8 490 (500-7⁄8)	880-1½ 490 (500-1½)			
CIRCLING	880-1 486 (500-1)	1000-1 606 (700-1)	1200-2¼ 806 (900-2¼)	1960-3 1566 (1600-3)	