

WAAS CH 50405 W25A	APP CRS 253°	Rwy Idg TDZE 891 Apt Elev 891
--	------------------------	---


RNAV (GPS) RWY 25

OCONEE COUNTY RGNL (CEU)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Anderson altimeter setting and increase all DA 47 feet and all MDA 60 feet; increase LPV all Cats, and LNAV Cat C visibility ½ mile; increase LNAV/VNAV all Cats visibility ¼ mile. Baro-VNAV and VDP NA when using Anderson altimeter setting.

MISSED APPROACH: Climb to 3000 direct ZEYLM and hold.

ASOS 119.275	GREER APP CON★ 118.8 270.275	UNICOM 122.7 (CTAF) 0
------------------------	--	---------------------------------

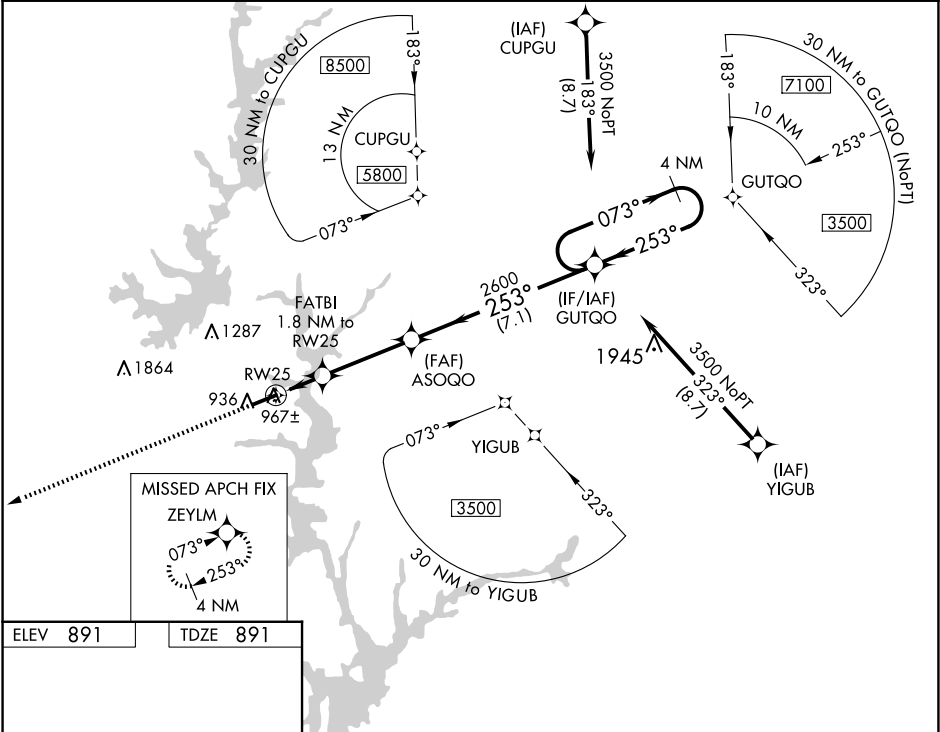

ELEV 891	TDZE 891
MIRL Rwy 7-25 0 REIL Rwy 7 and 25 0	

3000 ZEYLM	FATBI 1.8 NM to RW25	ASOQO 2600	GUTQO 4 NM Holding Pattern
*LNAV only.	*1 NM to RW25	1480*	GP 3.00° TCH 35
1 NM 0.8 3.4 NM 7.1 NM			
LPV DA	1091-3/4	200 (200-3/4)	NA
LNAV/VNAV DA	1141-7/8	250 (300-7/8)	NA
LNAV MDA	1220-1	329 (400-1)	NA
CIRCLING	1300-1 409 (500-1)	1360-1 469 (500-1)	1640-2 749 (800-2 1/4) NA