

WAAS CH 70331 W35A	APP CRS 352°	Rwy Idg TDZE 2426 Apt Elev 2430
--	------------------------	---


RNAV (GPS) RWY 35
WINSTON FLD (SNK)

RNP APCH-GPS.

Baro-VNAV NA when using Sweetwater altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. VDP NA with Sweetwater altimeter setting. When local altimeter setting not received, use Sweetwater altimeter setting and increase LPV DA to 2698 and all visibilities ¼ SM; increase LNAV/VNAV DA to 2748 and all visibilities ⅓ SM; increase all MDAs 80 feet and LNAV and Circling visibility Cat C ¼ SM. Circling NA to Rwys 8 and 26. Circling Rwy 17 NA at night.

MISSED APPROACH:
Climb to 5000 direct VARVY and on track 027° to WABVI and hold, continue climb-in-hold to 6000.

AWOS-3 119.925	FORT WORTH CENTER 127.45 290.3	UNICOM 122.8 (CTAF)
--------------------------	--	-------------------------------

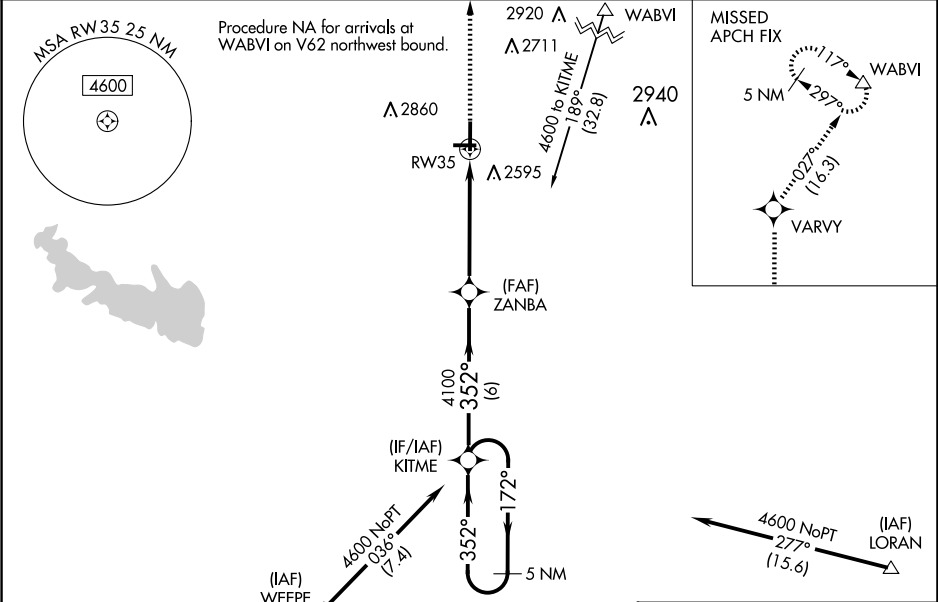

		ELEV 2430		TDZE 2426	
VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40). 5 NM Holding Pattern KITME		5000 		VARVY 	
		tr 027° 		WABVI 	
4600 ← 172° 352° →		ZANBA 4100 352° 4100 *LNAV only. *1 NM to RW35 RW35 6 NM 4.1 NM 1 NM			
GP 3.00° TCH 45					
CATEGORY	A	B	C	D	
LPV DA	2626-¾		200 (200-¾)	NA	
LNAV/VNAV DA	2676-¾		250 (300-¾)	NA	
LNAV MDA	2780-1		354 (400-1)	NA	
CIRCLING	2940-1 510 (600-1)		3220-2¼ 790 (800-2¼)	NA	

REIL Rwy 17 and 35
MIRL Rwy 17-35 ①

