

WAAS CH 77929 W11A	APP CRS 111°	Rwy Idg TDZE 1988 Apt Elev 1989	5091
--	------------------------	---	-------------


RNAV (GPS) RWY 11

L M CLAYTON (OLF')

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Wokla FLD/Glasgow-Valley County altimeter setting: increase LPV DA to 2329 ft and visibility ¾ SM, LNAV/VNAV DA to 2407 ft and visibility ½ SM; increase all MDA 160 feet and LNAV and Circling visibility Cat C/D ½ SM. Baro-VNAV and VDP NA with Glasgow altimeter setting.

MISSED APPROACH:
Climb to 4800 direct
CARAV and hold.

ASOS 118.325	SALT LAKE CENTER 126.85 305.2	UNICOM 122.8 (CTAF) 1
------------------------	---	---------------------------------

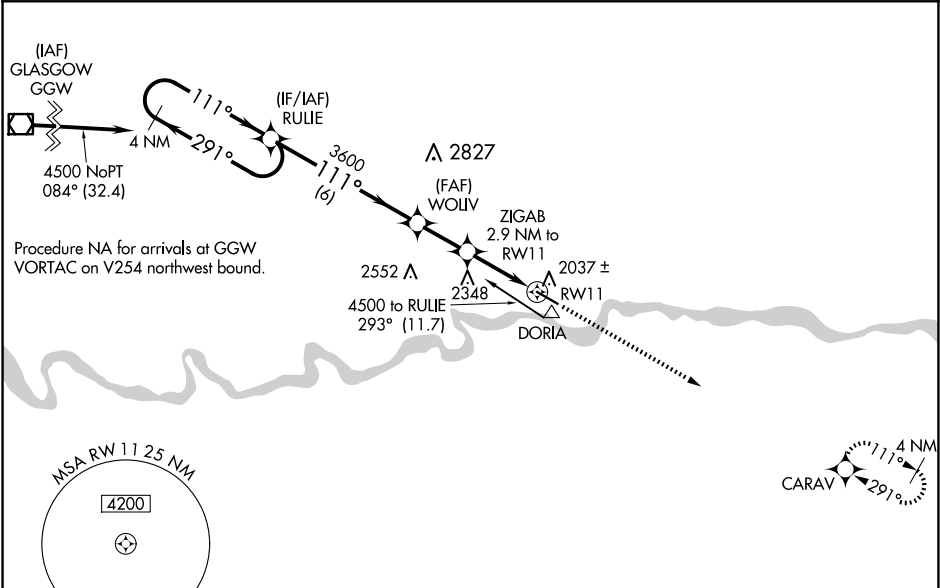

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 28).				4800	CARAV
RULIE		WOLIV		ZIGAB		*LNAV only.	
4500 ← 291° 111° →		3600		2.9 NM to RW11			
GP 3.00° TCH 40		*2940		*1.5 NM to RW11		RW11	
		6 NM		2 NM		1.4 NM	
						1.5 NM	
CATEGORY	A	B		C		D	
LPV DA	2188-¾ 200 (200-¾)						
LNAV/ VNAV DA	2266-7/8 278 (300-7/8)						
LNAV MDA	2500-1	512 (600-1)		2500-1¾ 512 (600-1¾)			
CIRCLING	2500-1	511 (600-1)		2660-2 671 (700-2)		2780-2½ 791 (800-2½)	

ELEV 1989 TDZE 1988

MIRL Rwy 11-29 1
REIL Rwy 11-29 1