

WAAS CH 93934 W02A	APP CRS 021°	Rwy Idg TDZE 718 Apt Elev 718	5001 718 718
--	------------------------	---	---

RNAV (GPS) RWY 2

ELLINGTON (LUG)

RNP APCH - GPS.

▼


▲

NA

Baro-VNAV and VDP NA when using BNA altimeter setting. Circling Rwy 20 NA at night.
Rwy 2 helicopter visibility reduction below ¼ SM NA. When local altimeter setting not received, use BNA altimeter setting and increase LPV DA to 1096 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 1531 feet and all visibilities ½ SM. Increase all MDAs 120 feet and LNAV visibility Cat B ¼ SM, Cats C and D ½ SM, Circling visibility Cats A and B ¼ SM and Cat C ½ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

MISSED APPROACH:
Climb to 1300 then climbing left turn to 3000 direct HUOG and hold.

AWOS-3 135.775	MEMPHIS CENTER 128.15 323.125	UNICOM 122.8 (CTAF)
--------------------------	---	-------------------------------

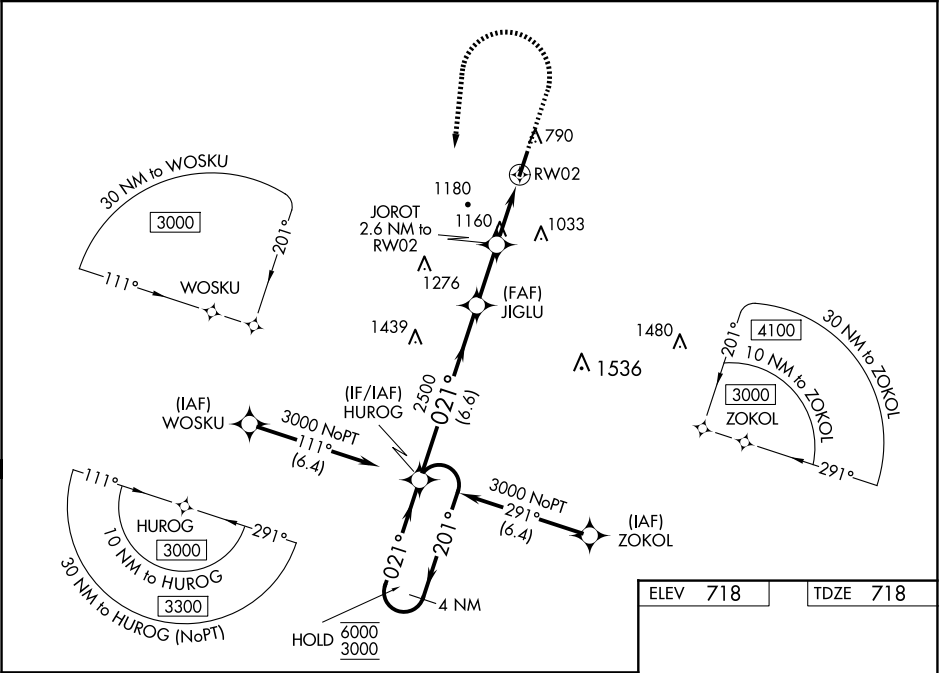

4 NM Holding Pattern		HUOG		JIGLU		JOROT		RWY2	
6000 ← 201°		021° →		021°		2.6 NM to RWY2		1.8 NM to RWY2	
3000				2500		1700		RWY2	
GP 3.30° TCH 55									
		6.6 NM		2.3 NM		0.8 NM		1.8 NM	
CATEGORY	A		B		C		D		
LPV DA	993-7/8		275 (300-7/8)				NA		
LNAV/ VNAV DA	1428-2		710 (800-2)				NA		
LNAV MDA	1420-1		702 (800-1)		1420-2		702 (800-2)		
CIRCLING	1420-1 702 (800-1)		1480-1 762 (800-1)		1540-2 1/2 822 (900-2 1/2)		1640-3 922 (1000-3)		

