



WAAS CH 56238 W27A	APP CRS 275°	Rwy Idg TDZE Apt Elev	4300 976 990
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 27

ROBEN-HOOD (RQB)

RNP APCH - GPS.		MISSED APPROACH: Climb to 2900 direct HUSHU and hold.
▼ ▲	Circling Rwy 32 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.	

AWOS-3P 125.875	MINNEAPOLIS CENTER 120.85 322.35	UNICOM 122.8 (CTAF) 1
---------------------------	--	--

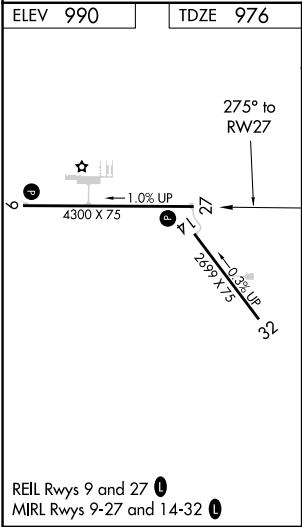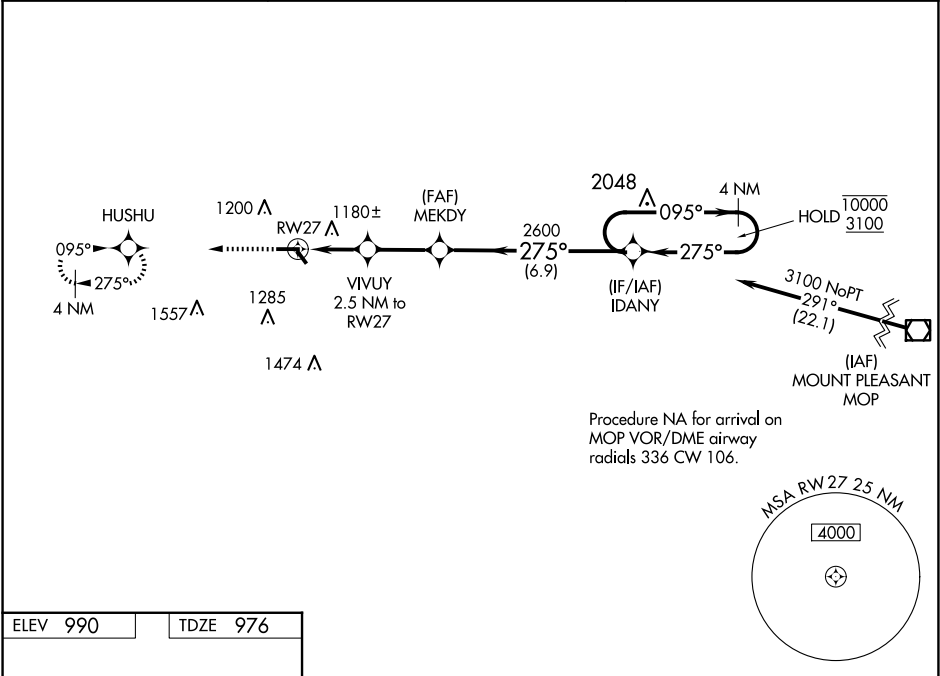

2900 HUSHU		VGSi and RNAV glidepath not coincident (VGSi Angle 3.08/TCH 25).		4 NM Holding Pattern	
VIVUY 2.5 NM to RW27		MEKDY 2600		IDANY 095° → 10000 3100	
1.4 NM to RW27		2600		GP 3.00° TCH 40	
1.4		1.1		2.6 NM	
1.4		1.1		6.9 NM	
CATEGORY	A	B	C	D	
LPV DA	1176-1		200 (200-1)		
LNAV/VNAV DA	1540-1½		564 (600-1½)		
LNAV MDA	1440-1		1440-1¾		464 (500-1¾)
CIRCLING	1500-1 510 (600-1)		1560-1 570 (600-1)		1700-2 710 (800-2) 1860-2¾ 870 (900-2¾)