WAAS CH 82041 W10A	APP CRS 096°	Rwy ldg 4201 TDZE 1089 Apt Elev 1090

RNAV (GPS) RWY 10
NEW CASTLE HENRY COUNTY MARLATT FLD (UWL)

RNP APCH - GPS.

Rwy 10 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using AID altimeter setting. When local altimeter setting not received, use Anderson altimeter setting; increase LPV DA to 1408 feet; increase LNAV/VNAV DA to 1424 feet; increase all MDAs 80 feet, LNAV visibility Cat C/D ⅜ SM, and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH: Climb to 3000 direct TASUY and hold.

AWOS-3	INDIANAPOLIS APP CON	UNICOM
132.375	135.45 317.8	123.05 (CTAF) L

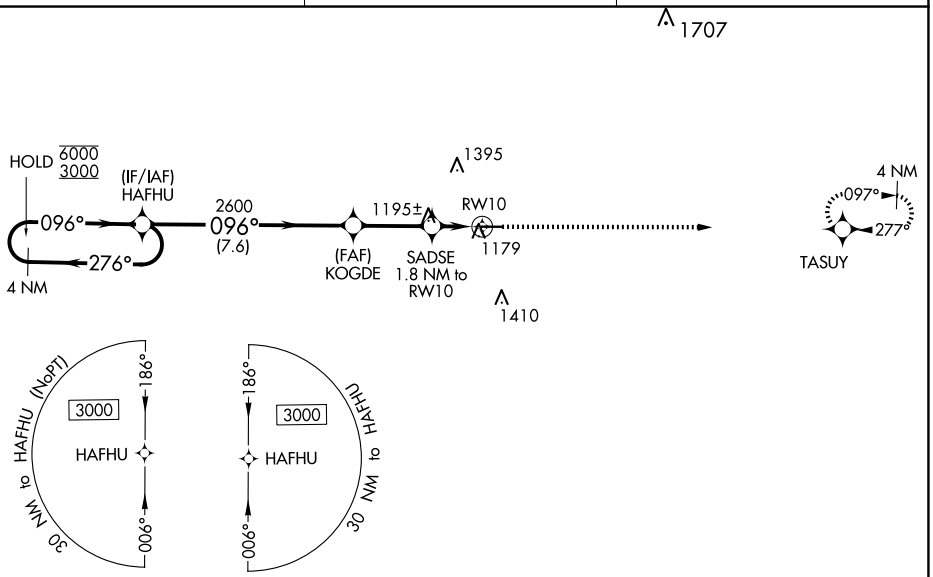

ELEV 1090	TDZE 1089

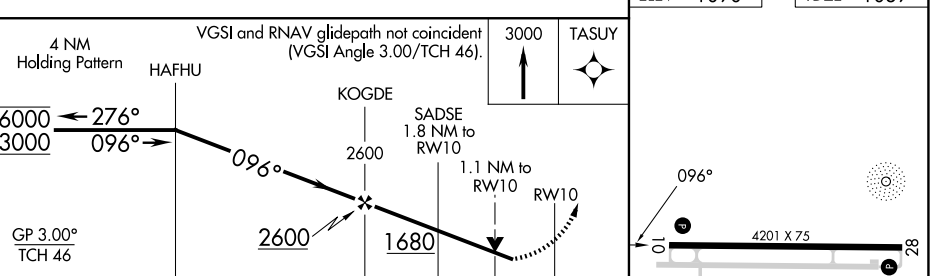

CATEGORY	A	B	C	D
LPV DA	1339-1		250 (300-1)	
LNAV/VNAV DA	1355-1		266 (300-1)	
LNAV MDA	1460-1		371 (400-1)	
C CIRCLING	1520-1 430 (500-1)	1540-1 450 (500-1)	1720-1¾ 630 (700-1¾)	1720-2 630 (700-2)

MIRL Rwy 10-28 L
REIL Rwys 10 and 28 L

EC-2, 02 OCT 2025 to 30 OCT 2025

EC-2, 02 OCT 2025 to 30 OCT 2025