WAAS CH 42818 W25A	APP CRS 246°	Rwy ldg 5003 TDZE 147 Apt Elev 147

RNAV (GPS) RWY 25
MARLBORO COUNTY JETPORT/H E AVENT FLD (BBP)

RNP APCH.

Baro-VNAV NA when using Florence altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 47°C. Rwy 25 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Florence altimeter setting and increase all DA 61 feet and MDA 80 feet. Increase LPV all Cats, and LNAV Cat C and D visibility ¼ mile.

MISSED APPROACH: Climb to 2500 direct LONCI and hold.

AWOS-3PT	FLORENCE APP CON ★	UNICOM
123.825	118.6 341.7	122.8 (CTAF)

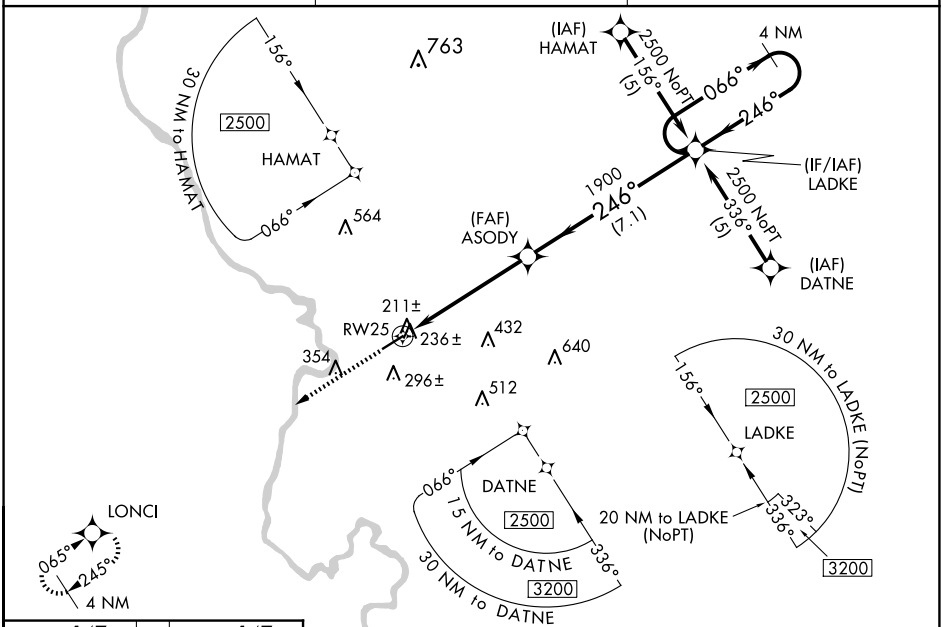

ELEV 147	TDZE 147

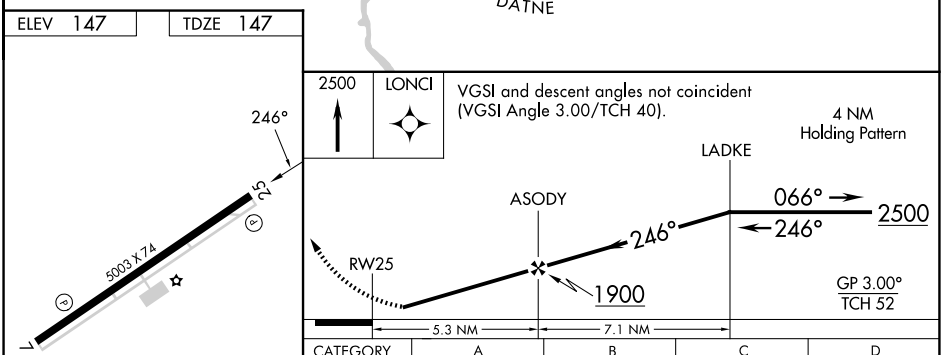

CATEGORY	A	B	C	D
LPV DA	441-1 294 (300-1)			
LNAV/VNAV DA	621-1¾ 474 (500-1¾)			
LNAV MDA	680-1 533 (600-1)		680-1½ 533 (600-1½)	680-1¾ 533 (600-1¾)

MIRL Rwy 7-25
REIL Rwys 7 and 25

SE-2, 02 OCT 2025 to 30 OCT 2025

SE-2, 02 OCT 2025 to 30 OCT 2025