

WAAS  
CH **53303**  
**W26A**

APP CRS  
**263°**

Rwy Idg  
TDZE  
Apt Elev  
**5102**  
**3254**  
**3279**

**RNAV (GPS) RWY 26**

SEARLE FLD (OGA)

RNP APCH.

▼

⚠


When local altimeter setting not received, use Imperial altimeter setting and increase all DA 86 feet and all MDA 100 feet, increase LPV all Cats visibility 1/8 SM, LNAV/VNAV all Cats and Circling Cat B visibility 1/4 SM. VDP and Baro-VNAV NA when using Imperial altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C.

MISSED APPROACH:  
Climb to 5300 direct  
AHUFU and hold.

AWOS-3  
**121.275**

DENVER CENTER  
**132.7 397.85**

UNICOM  
**122.8 (CTAF) 0**

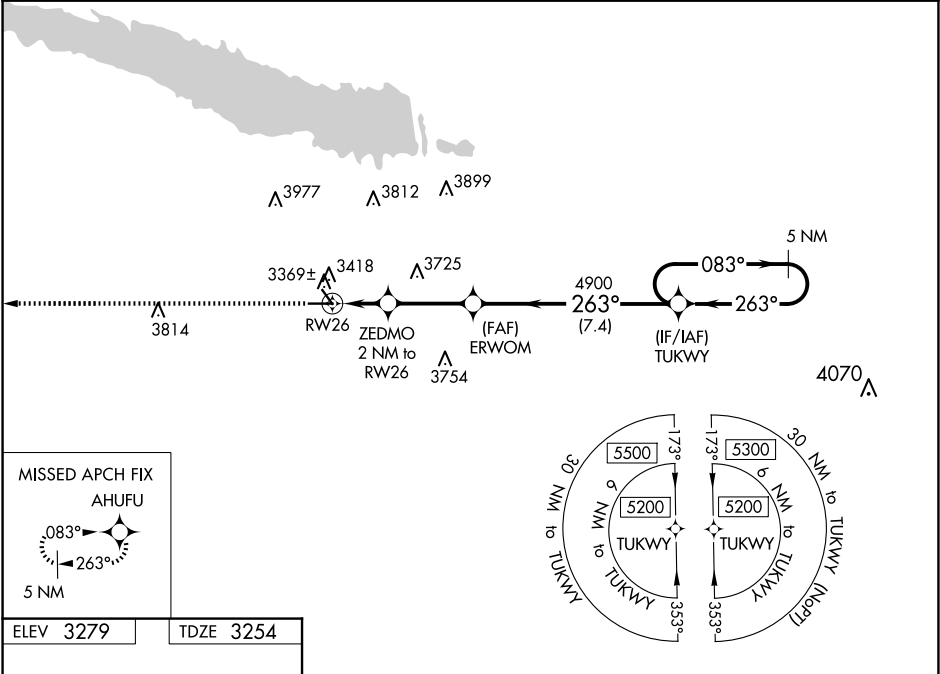

ELEV 3279

TDZE 3254

5300

AHUFU

\*LNAV only.

RW26

ZEDMO 2 NM to RW26

ERWOM

TUKWY

5 NM Holding Pattern

5102 X 75

2700 X 60

263° to RW26

3900\*

4900

5200

GP 3.00°

TCH 48

| CATEGORY     | A                     | B                     | C | D  |
|--------------|-----------------------|-----------------------|---|----|
| LPV DA       | 3504-1                | 250 (300-1)           |   | NA |
| LNAV/VNAV DA | 3540-1                | 286 (300-1)           |   | NA |
| LNAV MDA     | 3620-1                | 366 (400-1)           |   | NA |
| CIRCLING     | 3940-1<br>661 (700-1) | 4000-1<br>721 (800-1) |   | NA |