
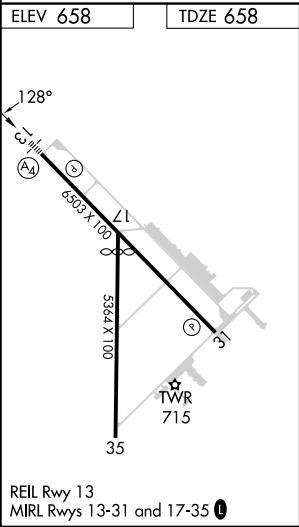


WAAS CH 82435 W13A	APP CRS 128°	Rwy Idg TDZE Apt Elev	6503 658 658
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 13

NEW BRAUNFELS NTL (BAZ)

RNP APCH							
▼ ▲ When local altimeter setting not received, use San Marcos Rgnl altimeter setting; increase LPV DA to 951 feet, LNAV/VNAV DA to 1169 feet; increase all MDAs 60 feet and visibility LNAV and Circling Cat C/D ¼ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using San Marcos altimeter setting. For inop ALS, increase LNAV/VNAV visibility to 1 ½ SM. Inop table does not apply to LPV all Cats and LNAV Cats A/B. For inop ALS when using San Marcos Rgnl altimeter setting, increase LPV all Cats visibility to ¾ SM and LNAV/VNAV all Cats visibility to 1 ¾ SM. When using San Marcos Rgnl altimeter setting, inop table does not apply to LNAV Cats A/B.				MAL S A4		MISSED APPROACH: Climb to 3500 direct NUMMO and hold, continue climb-in-hold to 3500.	
ATIS 119.325	SAN ANTONIO APP CON 124.45 335.625	NEW BRAUNFELS TOWER* 127.05 (CTAF) 0 285.4	GND CON 120.175	CNLC DEL 134.75	CNLC DEL 134.75 (When twr closed)	UNICOM 122.7	

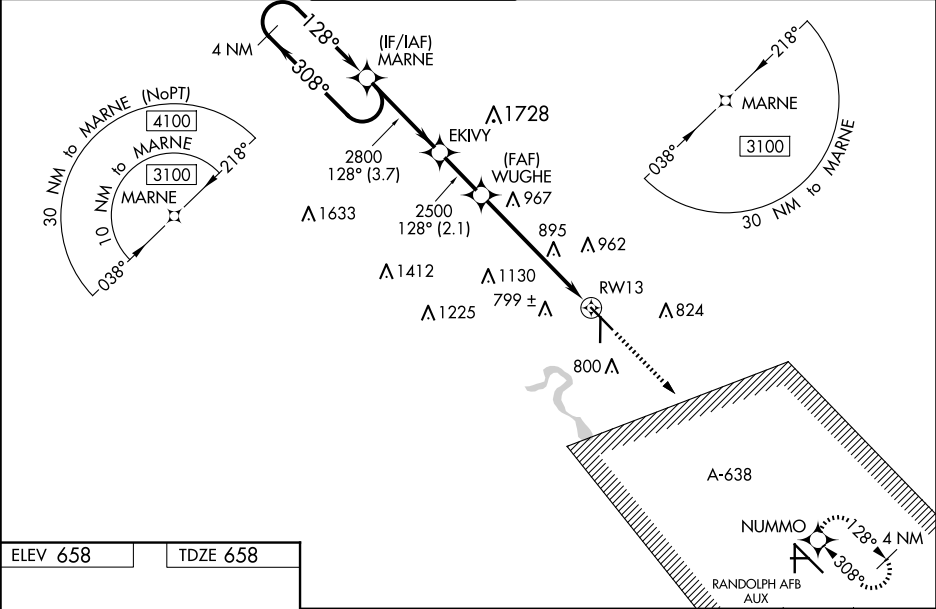

4 NM

Holding Pattern

3100

← 308°

→ 128°

GP 3.00°

TCH 50

MARNE

EKIVY

WUGHE

2500

2500

2800

3.7 NM

2.1 NM

4 NM

1.6 NM

3500

↑

NUMMO

✳

* 1.6 NM to RW13

* LNAV only.

RW13

CATEGORY	A		B		C		D	
LPV DA	908-¾				250 (300-¾)			
LNAV/VNAV DA	1126-1¼				468 (500-1¼)			
LNAV MDA	1220-1 562 (600-1)				1220-1¾ 562 (600-1¾)			
CIRCLING	1220-1 562 (600-1)	1240-1 582 (600-1)	1280-1¾ 622 (700-1¾)	1320-2 662 (700-2)				