


|                                        |                        |                             |                                         |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|
| WAAS<br>CH <b>42547</b><br><b>W29A</b> | APP CRS<br><b>294°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>5003</b><br><b>196</b><br><b>196</b> |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|

RNAV (GPS) RWY 29

SWINTON SMITH FLD AT REIDSVILLE MUNI (RVJ)

|                                                                                                                                                                                  |                                        |  |                                                                                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|--|---------------------------------------------------------------------------------------|
| RNP APCH - GPS.                                                                                                                                                                  |                                        |  | MISSED APPROACH: Climb to 3000 direct FEVNA and hold, continue climb-in-hold to 3000. |
| RADAR required for procedure entry when R-3005 A/B/C/E active.                                                                                                                   |                                        |  |                                                                                       |
| ▼ Rwy 29 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Hold-in-lieu NA when R-3005 A/B/C/E active. |                                        |  |                                                                                       |
| AWOS-3PT<br>128.325                                                                                                                                                              | JACKSONVILLE CENTER<br>127.575 269.025 |  | CTAF<br>122.9 ①                                                                       |

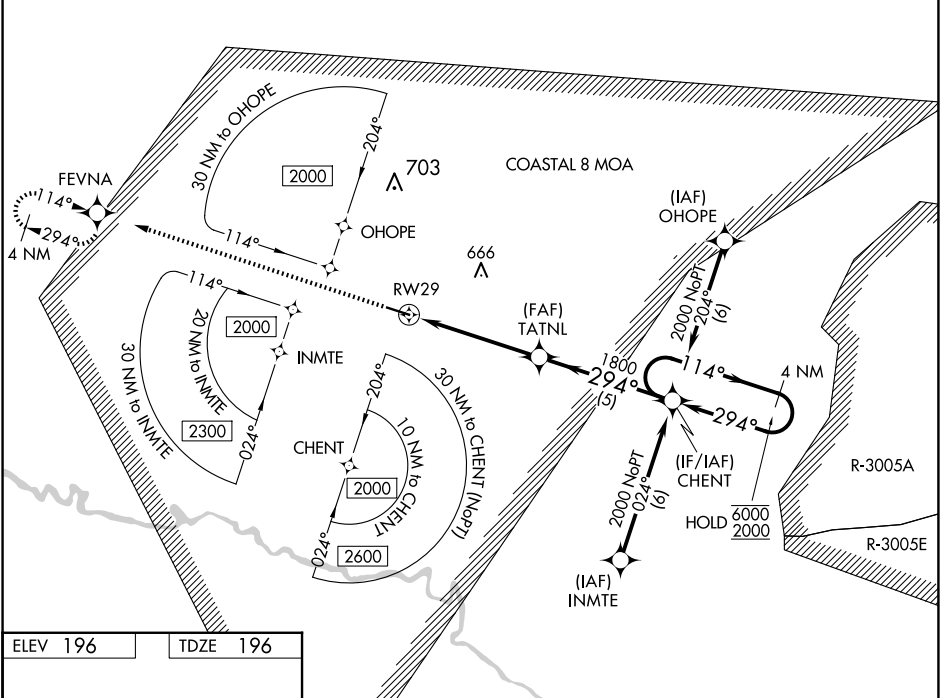

|                 |                 |
|-----------------|-----------------|
| ELEV <b>196</b> | TDZE <b>196</b> |
|-----------------|-----------------|

3000

FEVNA

1.4 NM to RW29

RW29

1800

TATNL

CHENT

Holding Pattern

114°

294°

6000

2000

GP 3.00°

TCH 45

251±

5003 X 75

0.6% UP

294°

| CATEGORY     | A      | B           | C                      | D                       |
|--------------|--------|-------------|------------------------|-------------------------|
| LPV DA       | 446-¾  |             | 250 (300-¾)            |                         |
| LNAV/VNAV DA | 584-1⅛ |             | 388 (400-1⅛)           |                         |
| LNAV MDA     | 660-1  | 464 (500-1) | 660-1⅜                 | 464 (500-1⅜)            |
| CIRCLING     | 660-1  | 464 (500-1) | 860-1¾<br>664 (700-1¾) | 1020-2¾<br>824 (900-2¾) |