


WAAS CH 78125 W27A	APP CRS 268°	Rwy Ldg TDZE Apt Elev	4799 2728 2729
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 27
TILLITT FLD (1S3)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 53°C (128°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Miles City altimeter setting: increase LPV and LNAV/VNAV DA to 3066 and all visibilities ¼ mile. Increase all MDA 100 feet and all Cat C and D visibilities ¼ mile. VDP and Baro-VNAV NA when using Miles City altimeter setting.

MISSED APPROACH: Climb to 6000 direct FREYA and on track 218° to CONUK and hold.

AWOS-3PT 121.125	SALT LAKE CENTER 126.85 305.2	UNICOM 122.8 (CTAF)
----------------------------	---	-------------------------------

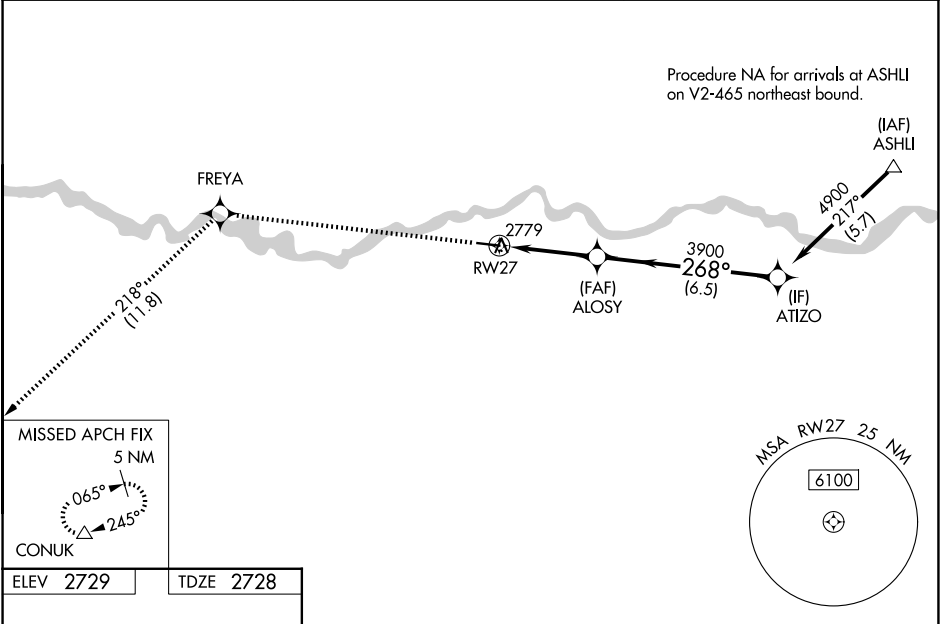

6000	FREYA	tr 218°	CONUK	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 29).	ATIZO																														
*LNAV only		*0.9 NM to RW27	ALOSY																																
			3900	268°	4900																														
			3900																																
		0.9 NM	2.6 NM	6.5 NM																															
					GP 3.00° TCH 51																														
<table><tr><td>CATEGORY</td><td colspan="2">A</td><td>B</td><td>C</td><td>D</td></tr><tr><td>LPV DA</td><td colspan="2">2978-1</td><td>250 (300-1)</td><td></td><td></td></tr><tr><td>LNAV/VNAV DA</td><td colspan="2">2978-1</td><td>250 (300-1)</td><td></td><td></td></tr><tr><td>LNAV MDA</td><td colspan="2">3040-1</td><td>312 (400-1)</td><td></td><td></td></tr><tr><td>CIRCLING</td><td>3160-1 431 (500-1)</td><td>3320-1 591 (600-1)</td><td>3340-1¾ 611 (700-1¾)</td><td colspan="2">3700-3 971 (1000-3)</td></tr></table>						CATEGORY	A		B	C	D	LPV DA	2978-1		250 (300-1)			LNAV/VNAV DA	2978-1		250 (300-1)			LNAV MDA	3040-1		312 (400-1)			CIRCLING	3160-1 431 (500-1)	3320-1 591 (600-1)	3340-1¾ 611 (700-1¾)	3700-3 971 (1000-3)	
CATEGORY	A		B	C	D																														
LPV DA	2978-1		250 (300-1)																																
LNAV/VNAV DA	2978-1		250 (300-1)																																
LNAV MDA	3040-1		312 (400-1)																																
CIRCLING	3160-1 431 (500-1)	3320-1 591 (600-1)	3340-1¾ 611 (700-1¾)	3700-3 971 (1000-3)																															