


WAAS CH 93936 W16A	APP CRS 160°	Rwy Idg TDZE 1257 Apt Elev 1266
--	------------------------	---

RNAV (GPS) RWY 16
GWINNER/ROGER MELROE FLD (GWR)


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 47°C (117°F). DME/DME RNP-0.3 NA. Circling NA to Rwy's 6 and 24. Baro-VNAV and VDP NA when using Fargo altimeter setting. When local altimeter setting not received, use Fargo altimeter setting: increase LPV DA to 1683 feet and visibility ¾ SM, and LNAV/VNAV DA to 1803 feet and visibility ¾ SM; increase all MDAs 180 feet and visibility LNAV Cat C/D ¾ SM, and Circling Cat C ¾ SM, and Circling Cat D ½ SM.

MISSED APPROACH:
Climb to 3500 direct
WASWK and hold.

AWOS-3 118.325	MINNEAPOLIS CENTER 127.35 278.3	UNICOM 122.7 (CTAF) 0
--------------------------	---	---------------------------------

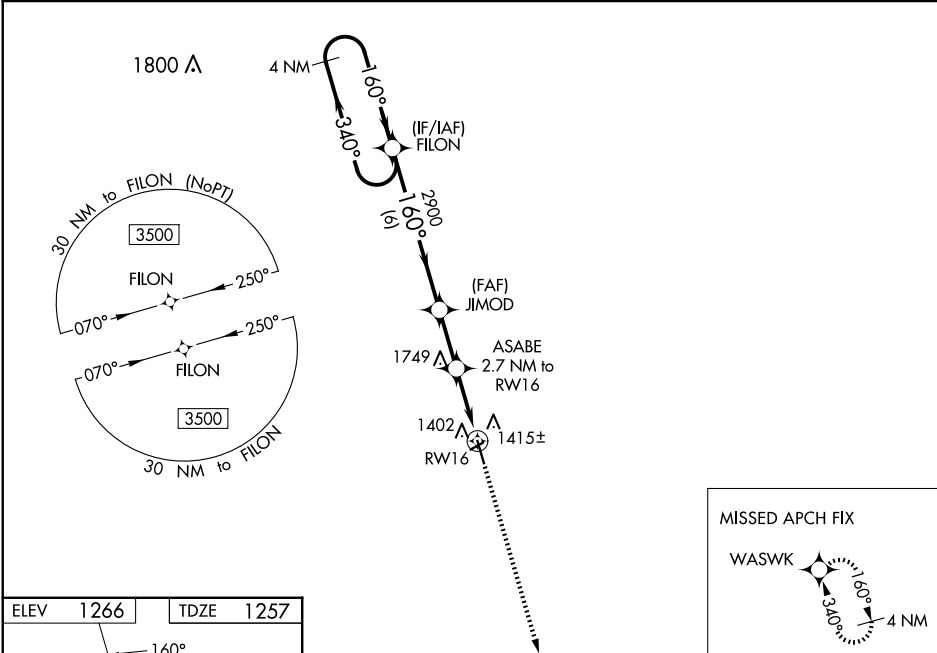

ELEV 1266	TDZE 1257
------------------	------------------

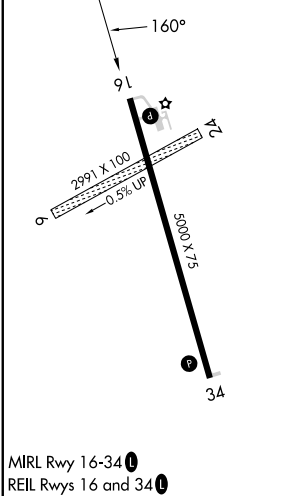

4 NM Holding Pattern				VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 25).				3500	WASWK
3500				FILON	JIMOD	ASABE	2.7 NM to RW16	*1.2 NM to RW16	RW16
GP 3.10° TCH 40				340°	160°	2900	*2180	1.5 NM	1.2 NM
CATEGORY				A	B	C	D		
LPV DA				1507-1		250 (300-1)			
LNAV/VNAV DA				1627-1¼		370 (400-1¼)			
LNAV MDA				1660-1 403 (400-1)		1660-1½ 403 (400-1½)			
CIRCLING				1780-1 514 (600-1)		1840-1½ 574 (600-1½)		2060-2½ 794 (800-2½)	