

WAAS CH 99317 W34A	APP CRS 340°	Rwy Idg 5000 TDZE 1257 Apt Elev 1266
--	------------------------	---



RNAV (GPS) RWY 34
GWINNER/ROGER MELROE FLD (GWR)

V Circling NA to Rwys 6 and 24. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received use Fargo altimeter setting: increase all DA to 1683 feet and all visibilities ½ SM; increase all MDAs 180 feet and visibility LNAV Cat C/D ½ SM, and Circling Cat C ½ SM, and Circling Cat D ½ SM. Baro-VNAV and VDP NA when using Fargo altimeter setting.


MISSED APPROACH:
Climb to 3500 direct
FILON and hold.

AWOS-3 118.325	MINNEAPOLIS CENTER 127.35 278.3	UNICOM 122.7 (CTAF) 1
--------------------------	---	--

MISSED APCH FIX

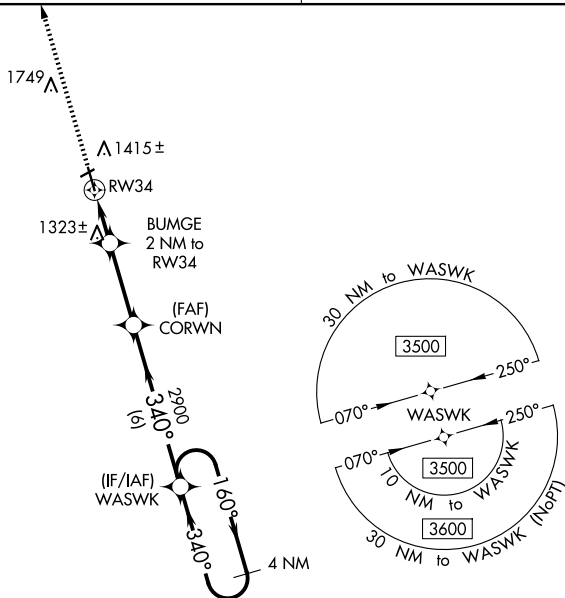

ELEV	1266		TDZE	1257
------	------	--	------	------

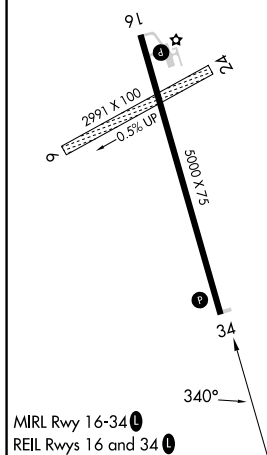

VGS1 and RNAV glidepath not coincident
(VGS1 Angle 3.00/TCH 25).

3500
↑
FILON

*LNAV only.

RW34

BUMGE
2 NM to RW34

CORWN
2900

WASWK

4 NM Holding Pattern

160° → 3500
← 340°

*0.9 NM to RW34

*1920

2900

GP 3.00°
TCH 40

0.9 NM 1.1 NM 3 NM 6 NM

CATEGORY	A	B	C	D
LPV DA		1507-1	250 (300-1)	
LNAV/DA		1507-1	250 (300-1)	
LNAV MDA		1580-1	323 (400-1)	
C CIRCLING	1780-1	514 (600-1)	1840-1½ 574 (600-1½)	2060-2½ 794 (800-2½)