

WAAS CH 69326 W24A	APP CRS 238°	Rwy Idg TDZE 713 Apt Elev 733	5004 713 733
--	------------------------	---	---

RNAV (GPS) RWY 24



DAVIDSON COUNTY EXEC (E.XX)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). When local altimeter setting not received, use Salisbury altimeter setting and increase all DA 37 feet and all MDA 40 feet, increase LPV and LNAV/VNAV all Cats visibility 1/8 SM, LNAV Cat C visibility 1/4 SM. DME/DME RNP-0.3 NA. Helicopter visibility reduction below 3/4 SM NA. Baro-VNAV and VDP NA when using Salisbury altimeter setting.

MISSED APPROACH: Climb to 3000 direct WOKIR and hold.

AWOS-3 119.825	GREENSBORO APP CON 126.6 327.075	GCO 135.075	UNICOM 122.8 (CTAF) 0
--------------------------	--	-----------------------	---------------------------------

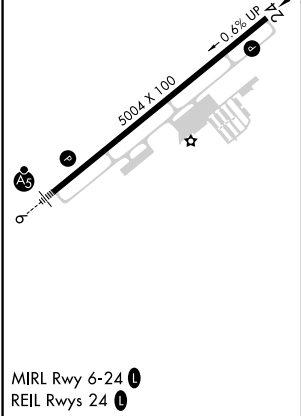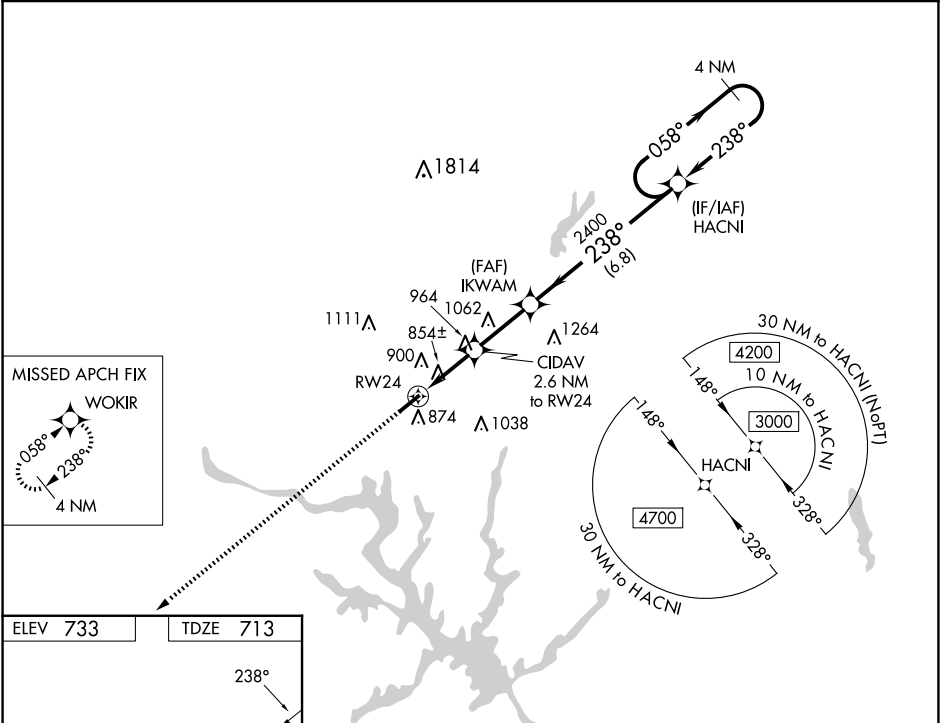

ELEV 733	TDZE 713
3000 WOKIR VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 30).	
*LNAV only *1.5 NM to RW24	
RW24 1580* 2400 238° 058° 238° 3000	
1.5 NM 1.1 NM 2.6 NM 6.8 NM	
CATEGORY	A B C D
LPV DA	1026-1 313 (300-1) NA
LNAV/VNAV DA	1150-1½ 437 (500-1½) NA
LNAV MDA	1220-1 507 (500-1) 1220-1¾ 507 (500-1¾) NA
CIRCLING	1220-1 487 (500-1) 1240-1 507 (600-1) 1340-1¾ 607 (700-1¾) NA