


WAAS CH 63120 W10A	APP CRS 094°	Rwy Idg TDZE Apt Elev	5200 840 840
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 10

WAUPACA MUNI (PCZ)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV ▲ NA below -16°C or above 54°C.		MISSED APPROACH: Climb to 2800 direct WVEGA and hold.
AWOS-3 118.625	MINNEAPOLIS CENTER 124.4 317.7	UNICOM 122.8 (CTAF) 0

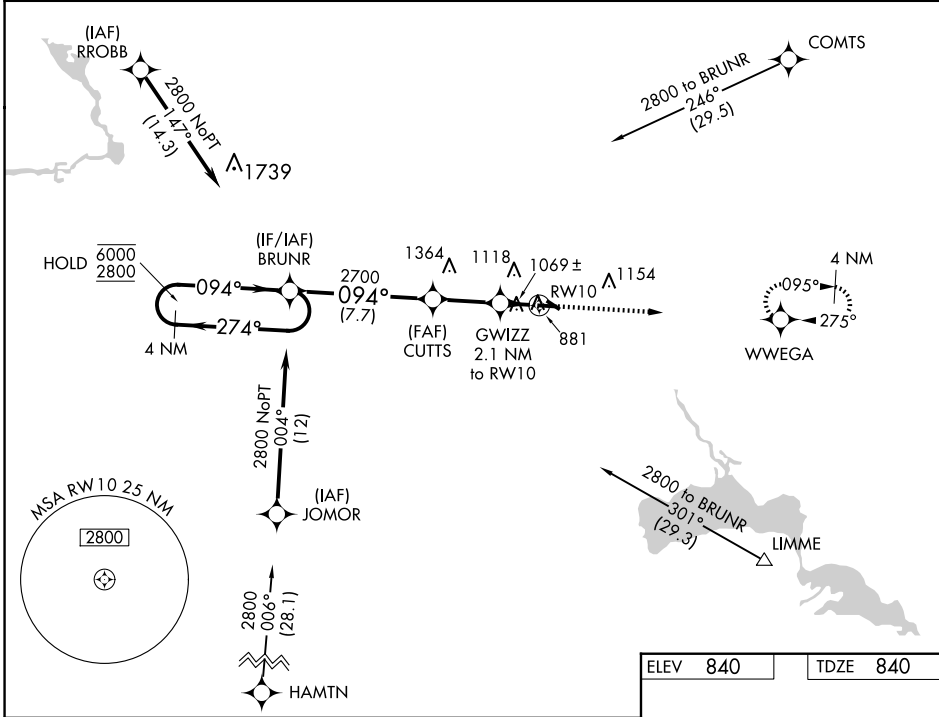

4 NM

Holding Pattern

BRUNR

2800

← 274°

→ 094°

6000

2800

GP 3.00°

TCH 40

CUTTS

2700

094°

2700

*1540

*1.6 NM to RW10

RW10

2800

WVEGA

↑

2800

WVEGA

*LNAV only.

7.7 NM

3.6 NM

0.5

1.6 NM

CATEGORY	A	B	C	D
LPV DA	1090-3/4		250 (300-3/4)	
LNAV/VNAV DA	1384-15/8		544 (600-1%)	
LNAV MDA	1380-1	540 (600-1)	1380-1 1/2	540 (600-1 1/2)
CIRCLING	1380-1 540 (600-1)	1420-1 580 (600-1)	1420-1 1/2 580 (600-1 1/2)	1500-2 660 (700-2)

ELEV 840

TDZE 840

094°

13

3899 X 75

5200 X 100

228

31

0.6% UP

0.7% UP

REIL Rwy 10 and 28

MIRL Rwy 10-28 and 13-31