WAAS CH 61313 W29A	APP CRS 292°	Rwy ldg 5350 TDZE 137 Apt Elev 142

RNAV (GPS) RWY 29
ST MARY'S COUNTY RGNL (2W6)

RNP APCH - GPS.

T A NA Rwy 29 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Patuxent River altimeter setting: increase LPV DA to 475 feet and all visibilities ⅛ SM, increase LNAV/VNAV DA to 688 feet and all visibilities ¼ SM. Increase all MDAs 40 feet and LNAV visibility Cats C/D ⅛ SM.

MISSED APPROACH: Climb to 700 then climbing left turn to 5000 direct COLIN and hold, continue climb in hold to 5000.

AWOS-3	PATUXENT APP CON ★	UNICOM
119.575	121.0 250.3	123.0 (CTAF) L

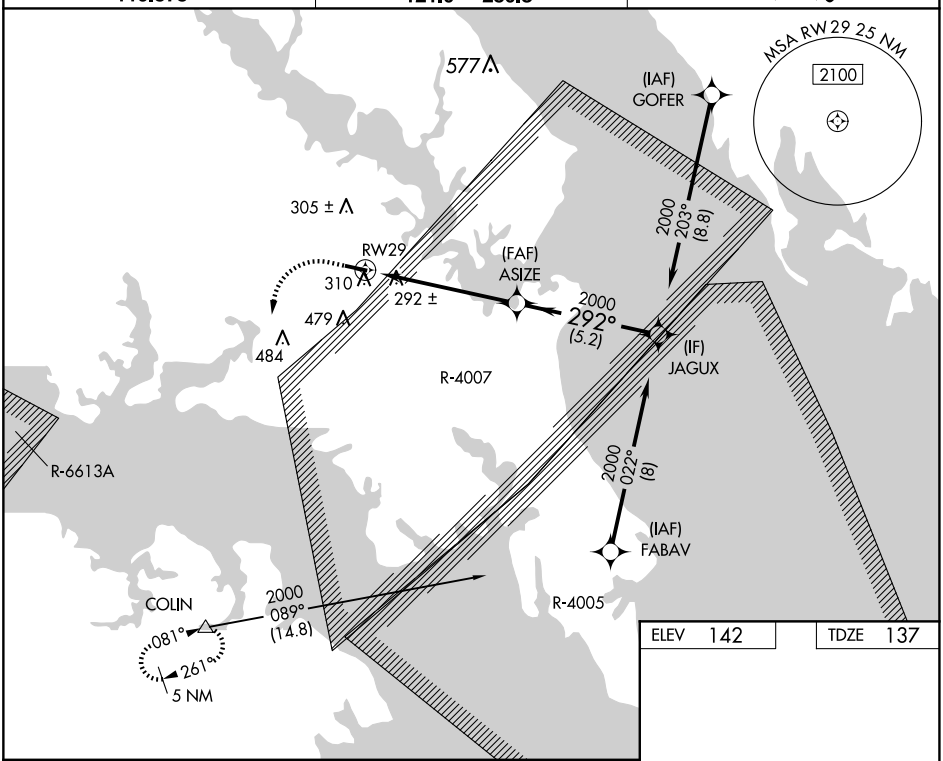

ELEV 142	TDZE 137

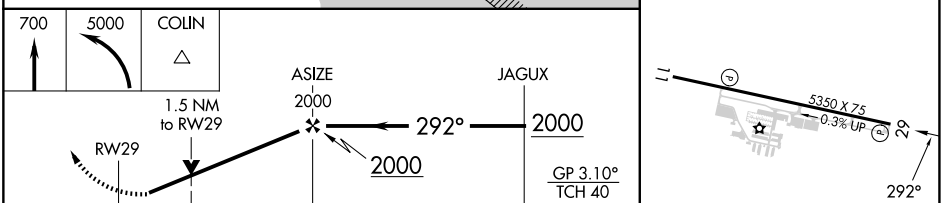

CATEGORY	A	B	C	D
LPV DA	441-⅞ 304 (300-⅞)			
LNAV/VNAV DA	654-1⅜ 517 (600-1⅜)			
LNAV MDA	620-1 483 (500-1)		620-1⅜ 483 (500-1⅜)	
C CIRCLING	660-1 518 (600-1)		840-2 698 (700-2)	840-2¼ 698 (700-2¼)

REIL Rwys 11 and 29 L
MIRL Rwy 11-29 L

NE-3, 02 OCT 2025 to 30 OCT 2025

NE-3, 02 OCT 2025 to 30 OCT 2025