

WAAS CH 82311 W22A	APP CRS 218°	Rwy Ldg 6000 TDZE 1025 Apt Elev 1025
--	------------------------	---

RNAV (GPS) RWY 22
UPPER CUMBERLAND RGNL (SRB)

NA Baro-VNAV NA when using Crossville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Crossville altimeter setting and increase LPV DA to 1447 feet, LNAV/VNAV DA to 1633 feet, increase LPV and LNAV/VNAV visibility ¾ SM. Increase all MDA 180 feet and LNAV Cat C visibility ¼ SM, Cat D visibility ½ SM. Increase Circling Cat C visibility ¾ SM and Circling Cat D visibility ¼ SM. VDP NA when using Crossville altimeter setting.

MISSED APPROACH:
Climb to 4000 direct
WENUB and hold.

AWOS-3P 128.25	MEMPHIS CENTER 128.15 323.125	UNICOM 122.975 (CTAF) 0
--------------------------	---	-----------------------------------

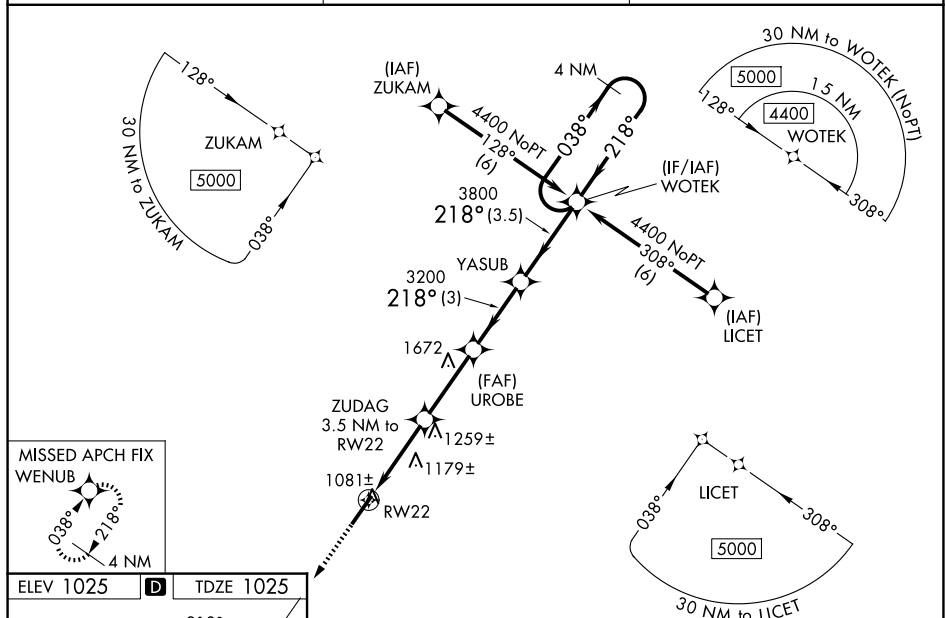


Diagram illustrating the RW22 approach procedure. The approach path is shown with a 218° heading. Key waypoints and distances are marked: WENUB, UROBE, YASUB, ZUDAG, and RW22. The approach is categorized by distance (A, B, C, D) and includes a table for LPV DA, LNAV/VNAV DA, LNAV MDA, and CIRCLING altitudes.

CATEGORY	A	B	C	D
LPV DA	1275- $\frac{3}{4}$	250 (300- $\frac{3}{4}$)		
LNAV/VNAV DA	1461-1 $\frac{1}{2}$	436 (500-1 $\frac{1}{2}$)		
LNAV MDA	1440-1	415 (500-1)	1440-1 $\frac{1}{4}$	415 (500-1 $\frac{1}{4}$)
CIRCLING	1480-1	455 (500-1)	1600-1 $\frac{1}{2}$ 575 (600-1 $\frac{1}{2}$)	1880-2 $\frac{3}{4}$ 855 (900-2 $\frac{3}{4}$)