

WAAS CH 86847 W35A	APP CRS 347°	Rwy Ldg 4005 TDZE 442 Apt Elev 442
--	------------------------	---

RNAV (GPS) RWY 35

RUSK COUNTY (R.F.T)

RNP APCH - GPS



▼

▲

Baro-VNAV and VDP NA when using GGG altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Rwy 35 helicopter visibility reduction below ¾ SM NA. Circling Rwy 12, 17 and 30 NA at night. When local altimeter setting not received, use GGG altimeter setting and increase LPV DA to 740 feet; increase LNAV/VNAV DA to 904 feet and all visibilities ¼ SM. Increase all MDAs 60 feet and LNAV visibility Cat C ¼ SM, and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 900 then climbing left turn to 3000 direct ZIDAV and hold.

AWOS-3 119.375	LONGVIEW APP CON ★ 124.275 257.975	UNICOM 122.8 (CTAF)
--------------------------	--	-------------------------------

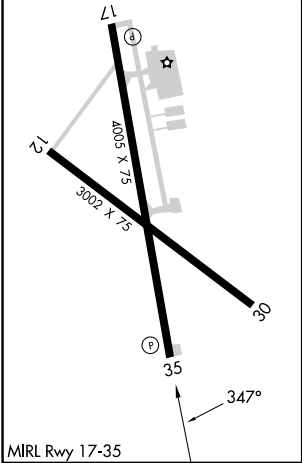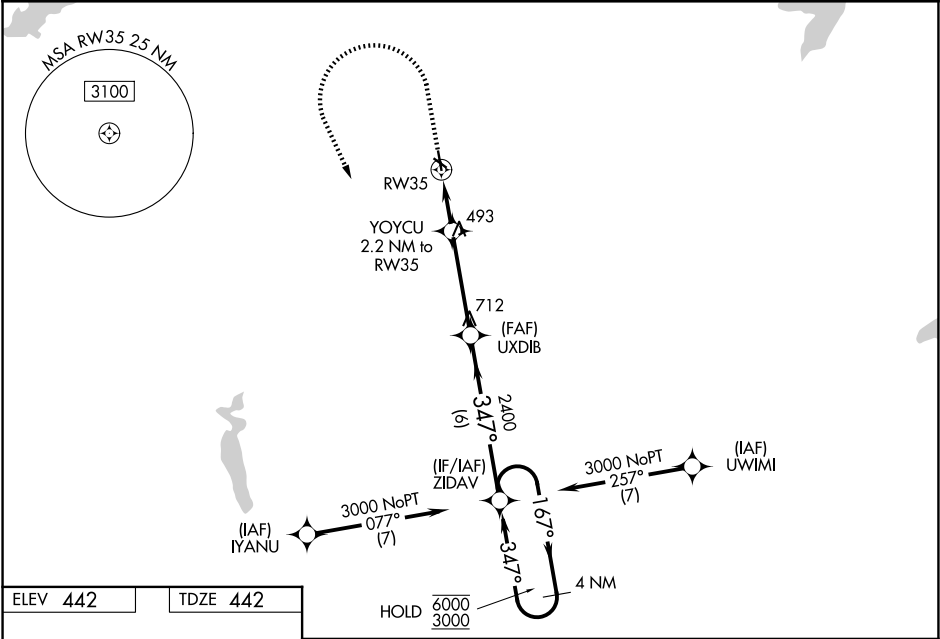

900 3000 ZIDAV ↑ ↶ ✧				4 NM Holding Pattern			
UXDIB YOYCU 2.2 NM to RW35 1.1 NM to RW35 1180 2400 167° 347° 6000 3000 GP 3.00° TCH 40							
1.1 NM 1.1 NM 3.8 NM 6 NM							
CATEGORY	A	B	C	D			
LPV DA	692-1		250 (300-1)		NA		
LNAV/VNAV DA	856-1⅛		414 (500-1⅛)		NA		
LNAV MDA	840-1		398 (400-1)		840-1⅛ 398 (400-1⅛)		
CIRCLING	920-1 478 (500-1)		960-1 518 (600-1)		1200-2¼ 758 (800-2¼)		