
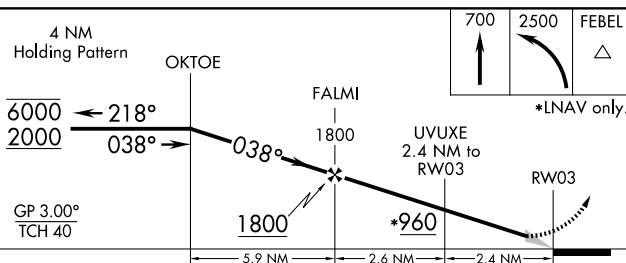


RNAV (GPS) RWY 3
WILSON INDUSTRIAL AIR CENTER (W03)

NA Baro-VNAV NA when using Rocky Mount altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Obtain local altimeter setting on CTAF; when not received, use Rocky Mount altimeter setting; increase LPV DA to 421 and visibility all Cats ½ SM; increase LNAV/VNAV DA to 439; increase all MDA 20 feet and LNAV visibility Cats C and D ½ SM. Circling Rwy 9, 15, 27, 33 NA at night.

MISSED APPROACH: Climb to 700, then climbing left turn to 2500 direct FEBEL and hold.

UNICOM
123.0 (CTAF) **L**

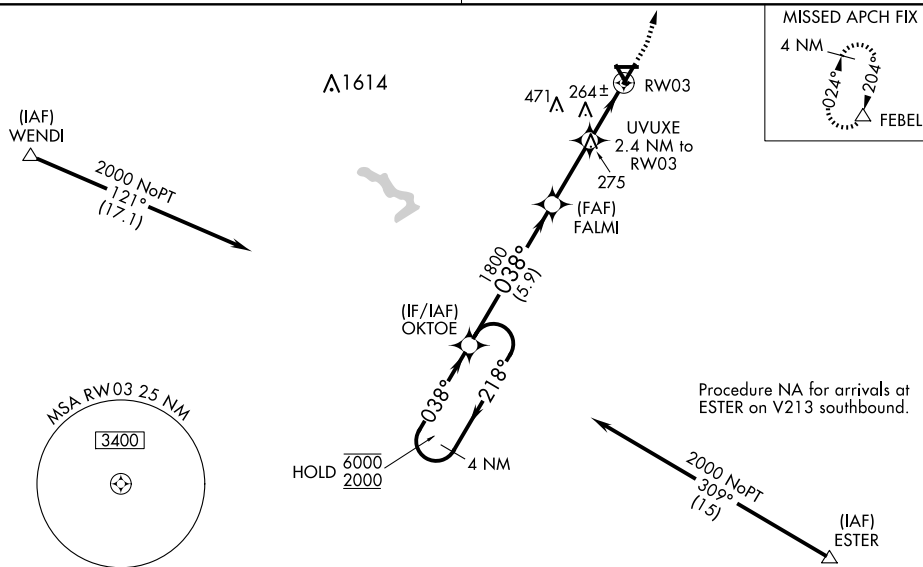

CATEGORY		A		B		C		D	
LPV	DA	406- ³ / ₄				250 (300- ³ / ₄)			
LNAV/ VNAV	DA	424- ⁷ / ₈				268 (300- ⁷ / ₈)			
LNAV	MDA	520-1 364 (400-1)				520-1 ³ / ₄ 364 (400-1 ³ / ₄)		520-2 364 (400-2)	
 CIRCLING		660-1 500 (500-1)				780-1 ³ / ₄ 620 (700-1 ³ / ₄)		780-2 620 (700-2)	

