WAAS CH 93530 W04A	APP CRS 040°	Rwy ldg 3600 TDZE 1168 Apt Elev 1171

RNAV (GPS) RWY 4
IOWA COUNTY (MRJ)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using Platteville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Platteville altimeter setting and increase LPV DA to 1473 feet, increase LNAV/VNAV DA to 1498 feet, increase all MDAs 60 feet, and LNAV visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 3600 direct ZOBIK and hold.

AWOS-3	CHICAGO CENTER	UNICOM
118.525	133.95 281.4	122.8 (CTAF) L

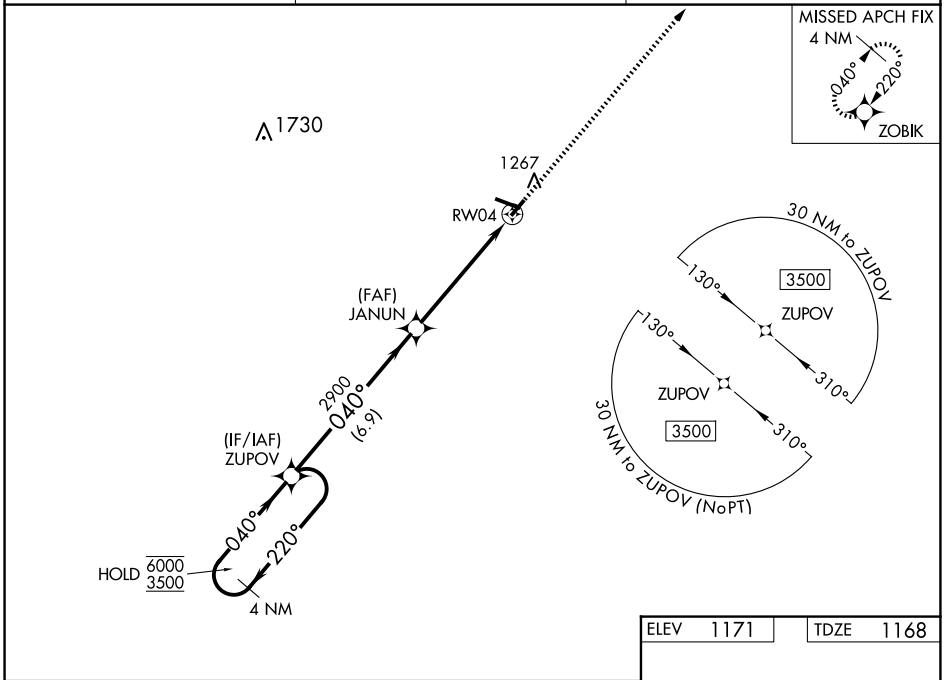

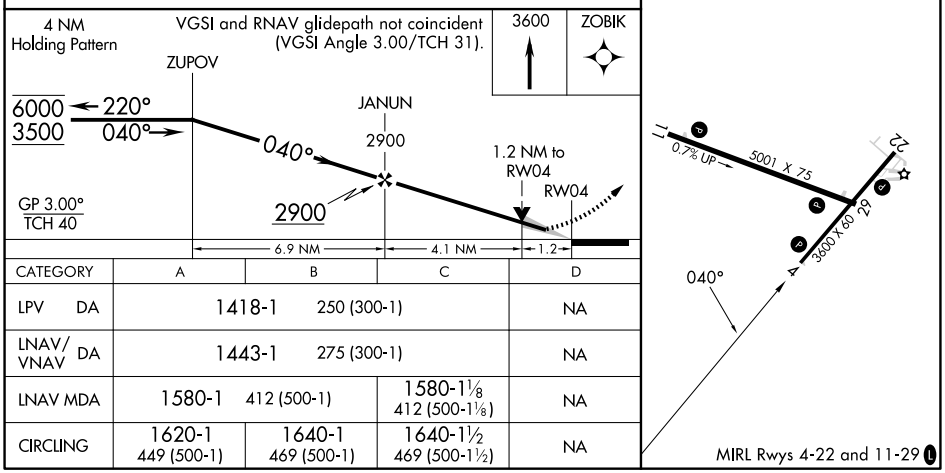

CATEGORY	A	B	C	D
LPV DA	1418-1 250 (300-1)			NA
LNAV/VNAV DA	1443-1 275 (300-1)			NA
LNAV MDA	1580-1 412 (500-1)		1580-1⅛ 412 (500-1⅛)	NA
CIRCLING	1620-1 449 (500-1)	1640-1 469 (500-1)	1640-1½ 469 (500-1½)	NA

EC-3, 02 OCT 2025 to 30 OCT 2025

EC-3, 02 OCT 2025 to 30 OCT 2025