

WAAS CH 58312 W25A	APP CRS 251°	Rwy Ldg TDZE 5 Apt Elev 5
--	------------------------	---

RNAV (GPS) RWY 25

THE FLORIDA KEYS MARATHON INTL (MTH)


▼

⚠

DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Key West Intl altimeter setting: increase LPV DA to 408 feet, LNAV/VNAV DA to 497 feet and all MDAs 100 feet; increase LPV all Cats visibility ½ SM, increase LNAV/VNAV all Cats, LNAV Cat C/D, and Circling Cat C visibility ¼ SM, and Circling Cat D visibility ½ SM. Baro-VNAV NA below -15°C (5°F) and above 48°C (118°F). Baro-VNAV NA when using Key West Intl altimeter setting.

MISSED APPROACH:
Climb to 3100 direct JANKA and hold.

ASOS 135.525	MIAMI CENTER 133.5 306.9	UNICOM 122.975 (CTAF) ①
------------------------	------------------------------------	-----------------------------------

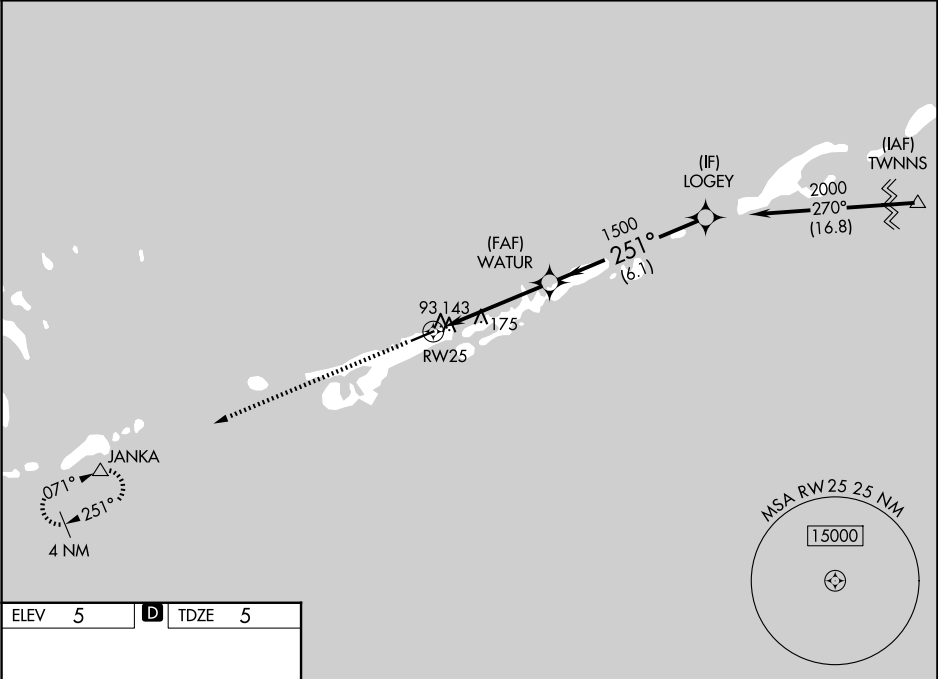

ELEV 5 D TDZE 5

3100

JANKA

△

251°

5008 x 100

62

☆

REIL Rwy 7 ①

MIRL Rwy 7-25 ①

3100 ↑		JANKA △		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 24).		Procedure Turn NA	
		RW25		WATUR		LOGEY	
				✕		251°	
				1500		2000	
		4.5 NM		6.1 NM		GP 3.00° TCH 40	
CATEGORY		A		B		C	
LPV DA		315-1		310 (400-1)		D	
LNAV/ VNAV DA		404-1½		399 (400-1½)			
LNAV MDA		440-1 435 (500-1)		440-1¼ 435 (500-1¼)		440-1½ 435 (500-1½)	
CIRCLING		460-1 455 (500-1)		480-1 475 (500-1)		620-1¾ 615 (700-1¾)	
						660-2 655 (700-2)	