
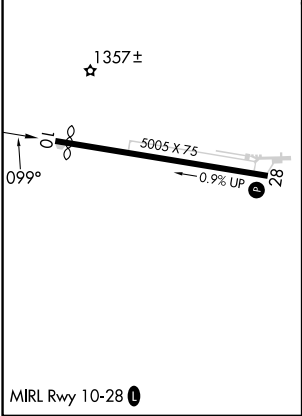


WAAS CH 73032 W10A	APP CRS 099°	Rwy Idg TDZE 1179 Apt Elev 1182
--	------------------------	---

RNAV (GPS) RWY 10
MOUNTAIN VIEW (MNTF)

RNP APCH - GPS.	
▼ Procedure NA at night. Rwy 10 helicopter visibility reduction below 1 SM ▲ NA NA. Use West Plains altimeter setting, when not received, use Fort Leonard Wood altimeter setting and increase all MDA 80 feet; increase LP Cats C and D visibility ¼ mile, increase LNAV Cat B visibility ¼ mile, LNAV Cats C and D visibility ⅓ mile, and increase Circling Cats B and C visibility ¼ mile.	MISSED APPROACH: Climb to 3700 direct TIYUR and hold.

UNO ASOS 123.825	KANSAS CITY CENTER 128.35 284.675	UNICOM 122.8 (CTAF) ①
----------------------------	---	---------------------------------

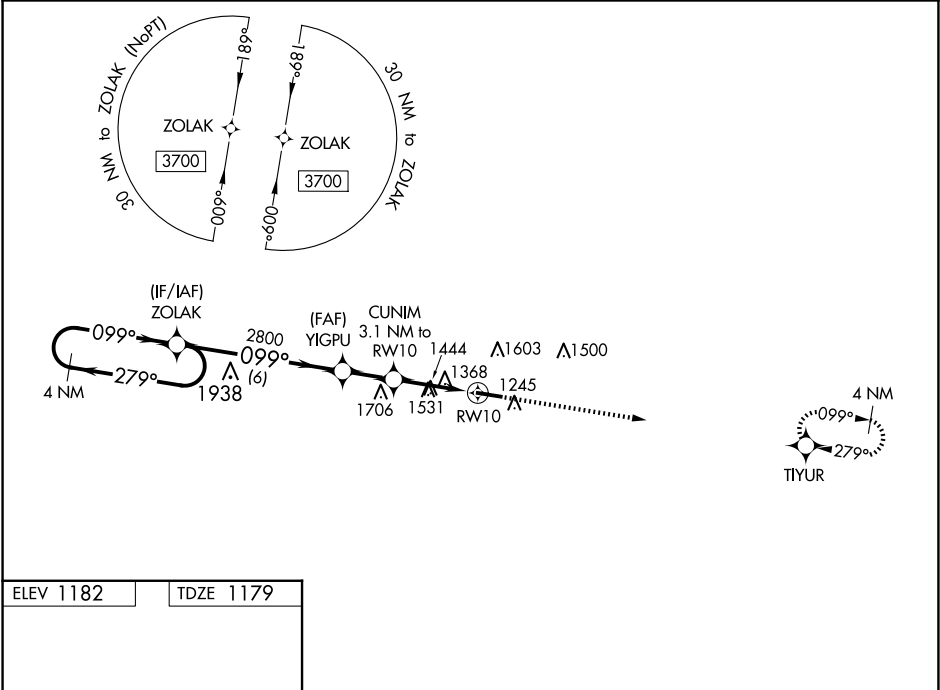

Visual Segment - Obstacles.				3700	TIYUR
4 NM Holding Pattern				3700	TIYUR
ZOLAK				3700	TIYUR
YIGPU				3700	TIYUR
CUNIM 3.1 NM to RW10				3700	TIYUR
RW10				3700	TIYUR
6 NM				3700	TIYUR
1.9 NM				3700	TIYUR
3.1 NM				3700	TIYUR
CATEGORY	A	B	C	D	
LP MDA	1780-1	601 (600-1)	1780-1¾	601 (600-1¾)	
LNAV MDA	1820-1	641 (700-1)	1820-1⅞	641 (700-1⅞)	
CIRCLING	1880-1	2080-1¼	2080-2¾	2180-3	
	698 (700-1)	898 (900-1¼)	898 (900-2¾)	998 (1000-3)	