

MILFORD, IOWA

AL-6455 (FAA)


23278


VOR/DME SPW 115.15 Chan 98 (Y)	APP CRS 005°	Rwy Idg TDZE Apt Elev N/A N/A 1439
--	------------------------	--

VOR-A
FULLER(4D8)

DME required. RADAR required for procedure entry.	MISSED APPROACH: Climbing right turn to 3000 direct SPW VOR/DME and hold.
 NA Circling NA to Rwy 18 and 36. Procedure NA at night. Use Spencer altimeter setting, when not received, use Estherville altimeter setting and increase all MDA 40 feet.	

SPW ASOS 126.625	MINNEAPOLIS CENTER 127.75 257.7	CTAF 122.9
----------------------------	---	----------------------

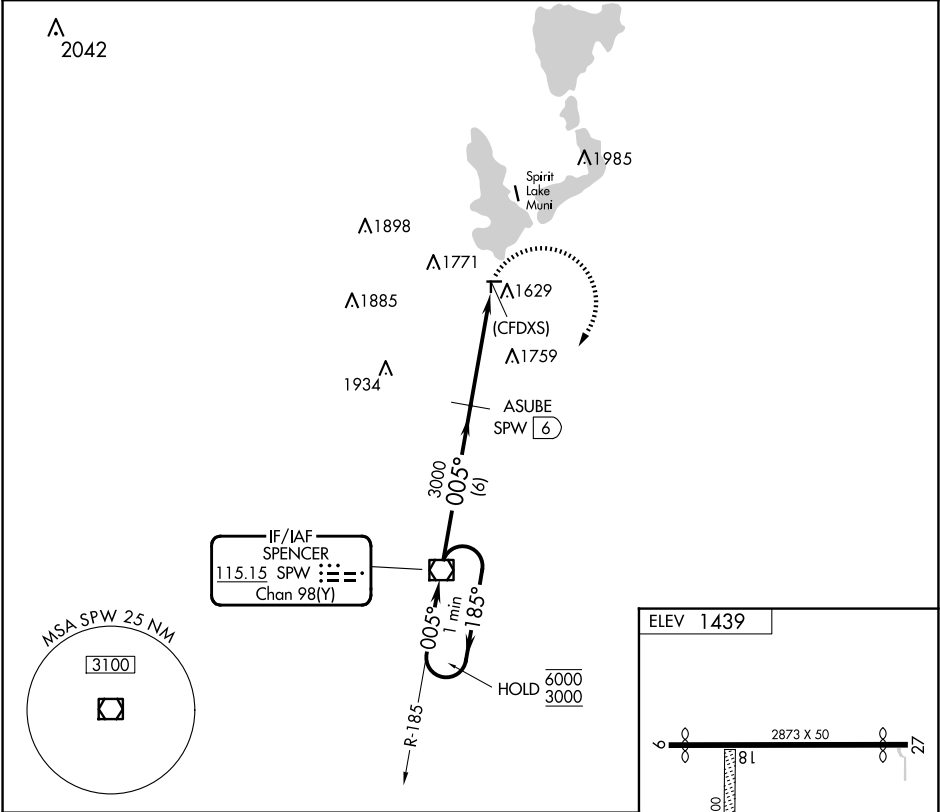

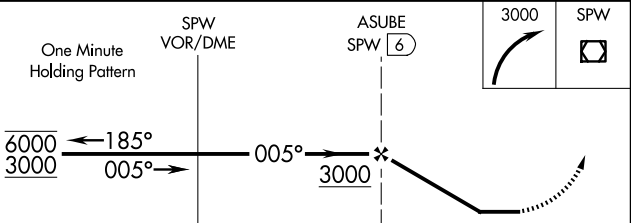One Minute Holding Pattern  6000 3000 ←185° 005°→ 005° 3000 6 NM 4.4 NM 0.3% UP 2200 X 1 005° URL Rwy 9-27 and 18-36		SPW VOR/DME		ASUBE SPW 6		3000		SPW			
		CATEGORY		A		B		C		D	
CIRCLING		2100-1 661 (700-1)				NA					
								FAF to MAP 4.4 NM			
								Knots		60 90 120 150 180	
								Min:Sec		4:24 2:56 2:12 1:46 1:28	

MILFORD, IOWA
Amdt 1 03JAN19

43°20'N-95°10'W

FULLER(4D8)
VOR-A

NC-3, 02 OCT 2025 to 30 OCT 2025

NC-3, 02 OCT 2025 to 30 OCT 2025