

WAAS CH 50500 W25A	APP CRS 246°	Rwy Ldg 4463 TDZE 10 Apt Elev 11
--	------------------------	---

RNAV (GPS) RWY 25

NEW SMYRNA BEACH MUNI (JACK BOLT FLD) (EVB)


RNP APCH-GPS.

▼

Rwy 25 helicopter visibility reduction below 1 SM NA. Straight-in Rwy 25 NA at night, Circling Rwy 7, 11, 25 NA at night. When local altimeter setting not received, use Daytona Beach altimeter setting increase LPV DA to 328 feet and all MDA 40 feet. Increase LNAV Cat C visibility ½ SM and Circling Cat C visibility ¼ SM.

MISSED APPROACH: Climb to 4000 direct NOBPI and on track 1.57° to OAKIE and hold, continue climb-in-hold to 4000.

ATIS 124.625	DAYTONA APP CON 125.35 322.3	NEW SMYRNA BEACH TOWER★ 119.675 (CTAF) 0	GND CON 121.325	UNICOM 122.95
------------------------	--	--	---------------------------	-------------------------

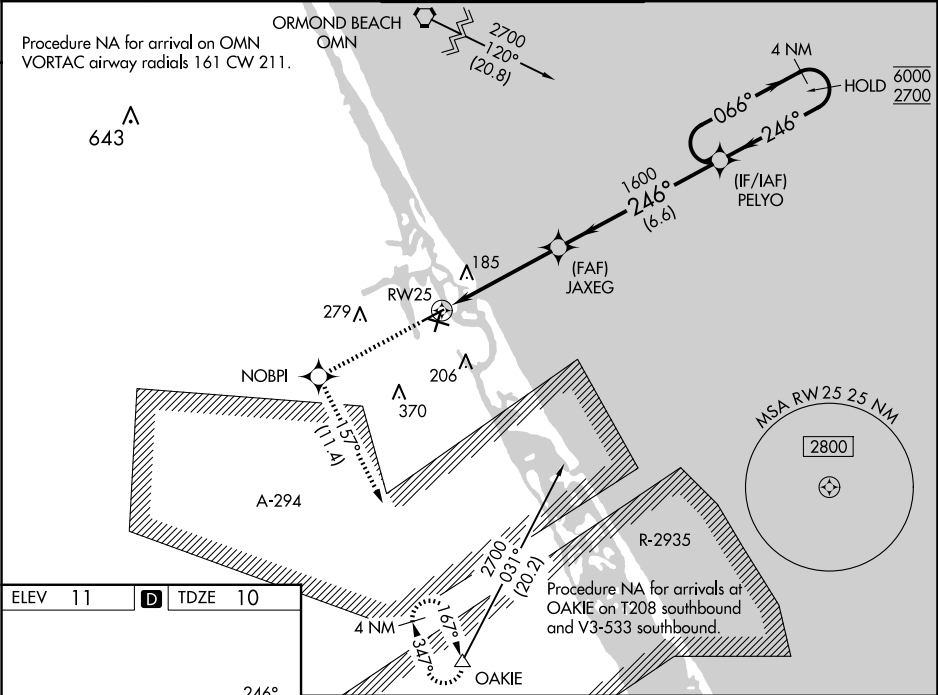

ELEV 11	D	TDZE 10
---------	---	---------

246°

3000 X 75

02

TWR

4000 X 100

4319 X 75

2

4000

NOBPI

tr 1.57°

OAKIE

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 46).

4 NM Holding Pattern

PELYO

066° → 6000

← 246° 2700

GP 3.00° TCH 60

4.7 NM

6.6 NM

JAXEG 1600

RW25

CATEGORY	A	B	C	D
LPV DA	303-1 293 (300-1)			NA
LNAV MDA	440-1	430 (500-1)	440-1¼ 430 (500-1¼)	NA
CIRCLING	440-1 429 (500-1)	520-1 509 (600-1)	680-1¾ 669 (700-1¾)	NA