


WAAS CH 93544 W04A	APP CRS 038°	Rwy Ldg TDZE Apt Elev	4870 1240 1243
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 4R

CHANDLER MUNI (CHD)

RNP APCH - GPS.		MISSED APPROACH: (Do not exceed 210K until DECTU) Climb to 2200 then climbing right turn to 4000 direct to DECTU and hold.		
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.				
ATIS 128.325	PHOENIX APP CON 123.7 363.0	CHANDLER TOWER ★ 126.1 (CTAF) 1 (N and W) 133.1 (S and E)	GND CON 124.4	UNICOM 122.95

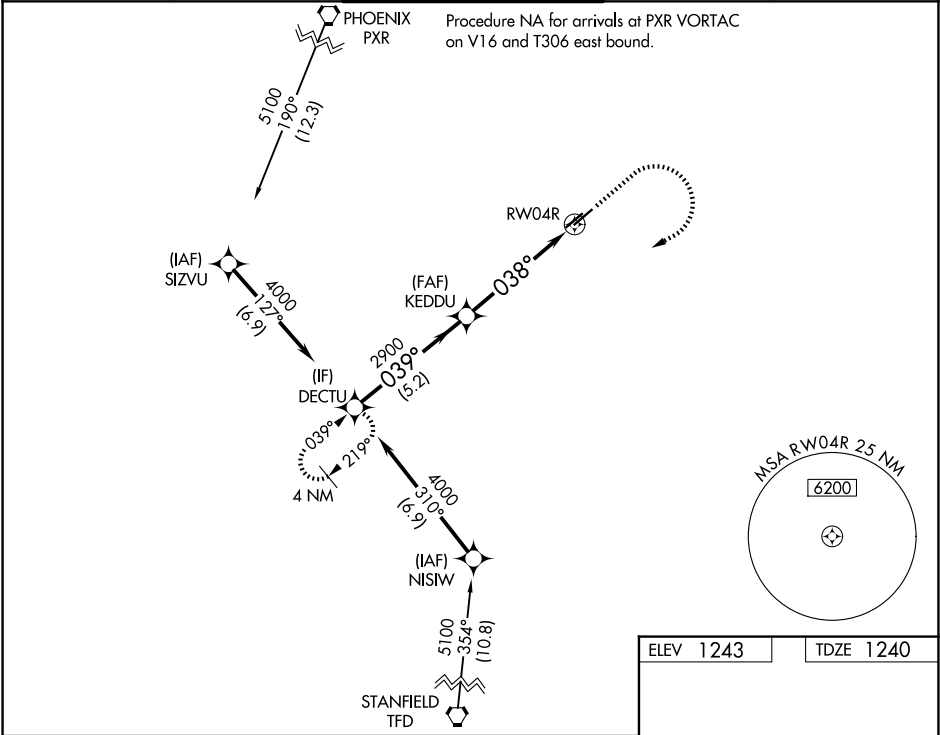

DECTU		KEDDU		RWY 4R	
4000		2900		4000	
GP 3.00°		039°		038°	
TCH 39		5.2 NM		1.1 NM	
CATEGORY	A	B	C	D	
LPV DA	1490-3/4	250 (300-3/4)		NA	
LNAV/VNAV DA	1640-1 1/8	400 (400-1 1/8)		NA	
LNAV MDA	1640-1	400 (400-1)	1640-1 1/8 400 (400-1 1/8)	NA	
CIRCLING	1700-1 457 (500-1)	1760-1 517 (600-1)	1760-1 1/2 517 (600-1 1/2)	NA	

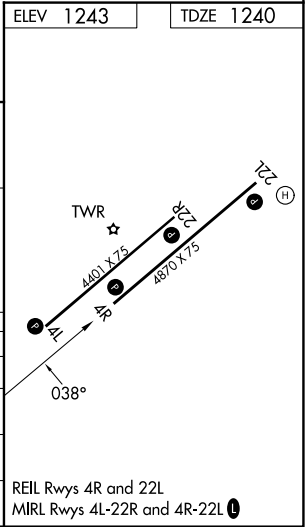

SW-4, 02 OCT 2025 to 30 OCT 2025

SW-4, 02 OCT 2025 to 30 OCT 2025