

APP CRS  
**140°**

Rwy Idg  
TDZE  
Apt Elev

**3299**  
**297**  
**297**

**RNAV (GPS) RWY 14**  
GLADEWATER MUNI (Ø7F')


RNP APCH.

▼  
NA

Procedure NA at night. Rwy 14 helicopter visibility reduction below 1 SM NA. Use Gilmer altimeter setting, when not received use Longview altimeter setting and increase all MDA 20 feet and increase LNAV Cat C visibility ½ SM.

MISSED APPROACH:  
Climbing right turn to 2500 direct GAVVN and hold.

|                               |                                              |                      |
|-------------------------------|----------------------------------------------|----------------------|
| JXI AWOS-3PT<br><b>120.25</b> | LONGVIEW APP CON ★<br><b>124.275 257.975</b> | CTAF<br><b>122.9</b> |
|-------------------------------|----------------------------------------------|----------------------|

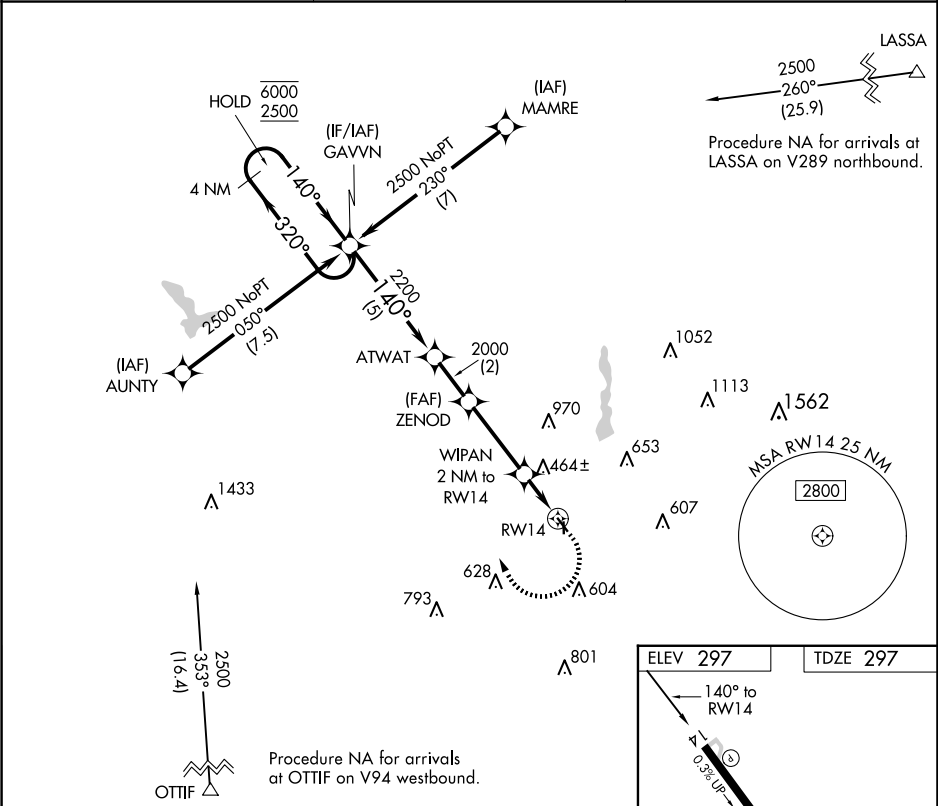

|                                                                                    |                   |                    |                       |    |
|------------------------------------------------------------------------------------|-------------------|--------------------|-----------------------|----|
| Visual Segment - Obstacles.                                                        |                   |                    |                       |    |
| 4 NM Holding Pattern GAVVN                                                         |                   |                    |                       |    |
| 6000 ← 320° 2500 140° → 140° ATWAT ZENOD 2200 2000 WIPAN 2 NM to RWY 14 960 RWY 14 |                   |                    |                       |    |
| 5 NM 2 NM 3.3 NM 2 NM                                                              |                   |                    |                       |    |
| CATEGORY                                                                           | A                 | B                  | C                     | D  |
| LNAV MDA                                                                           | 800-1 503 (600-1) |                    | 800-1 503 (600-1 3/8) | NA |
| CIRCLING                                                                           | 880-1 583 (600-1) | 1000-1 703 (800-1) | 1000-2 703 (800-2)    | NA |