


WAAS CH 82138 W30A	APP CRS 299°	Rwy Idg TDZE Apt Elev	3638 134 134
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 30
BUTLER/CHOCTAW COUNTY (Ø9A)

▼ ▲ NA	Baro-VNAV NA. DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. Procedure NA at night. Use Demopolis altimeter setting; when not received, use Key Fld altimeter setting and increase LPV DA to 497, LNAV/VNAV DA to 487; and increase all MDA 60 feet; increase LPV visibility all Cats ¼ mile and increase Circling Cat C visibility ¼ mile.	MISSED APPROACH: Climb to 2500 direct JIGID and hold.
-------------------------	--	---

DYA AWOS-3P 119.475	MERIDIAN APP CON ★ 121.275 348.7	UNICOM 122.8 (CTAF) 0
-------------------------------	--	---------------------------------

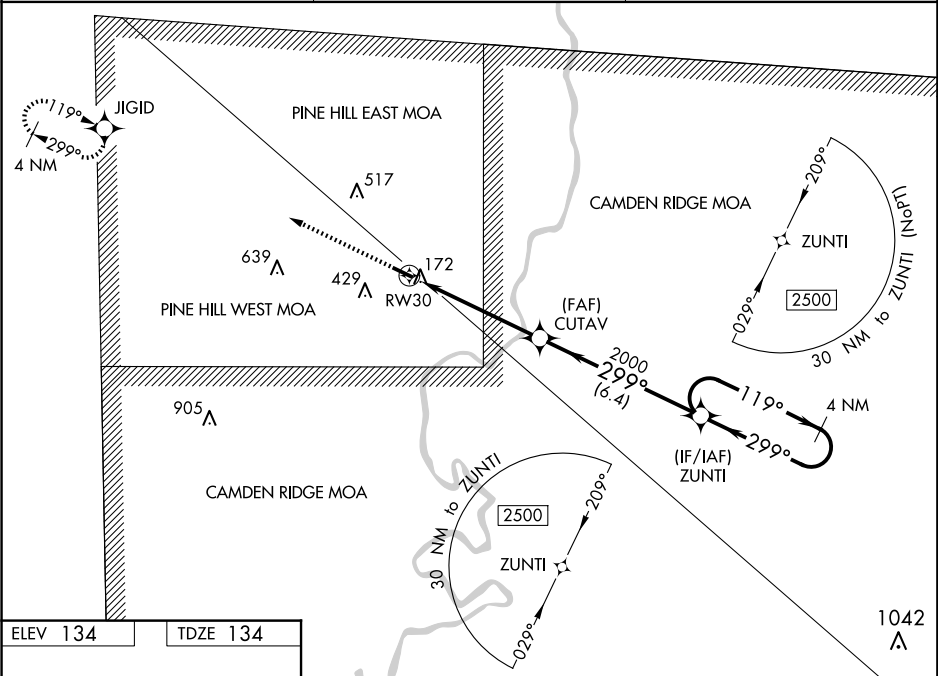

ELEV 134	TDZE 134
-----------------	-----------------

2500 ↑ JIGID		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40).		4 NM Holding Pattern
CUTAV		ZUNTI		
2000		2000		
RW30		119° → 2500		
5.2 NM		6.4 NM		
GP 3.30° TCH 58				
CATEGORY	A	B	C	D
LPV DA	450-1	316 (400-1)		NA
LNAV/VNAV DA	440-1	306 (400-1)		NA
LNAV MDA	580-1	446 (500-1)	580-1 3/8 446 (500-1 3/8)	NA
CIRCLING	680-1 546 (600-1)	800-1 666 (700-1)	800-1 3/4 666 (700-1 3/4)	NA

MIRL Rwy 12-30 0