

WAAS CH 56334 W15A	APP CRS 154°	Rwy Idg TDZE Apt Elev	4200 1378 1379
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 15

EL DORADO/CAPT JACK THOMAS MEML (EQA)


RNP APCH-GPS.

NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Rwy 15 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Colonel James Jabara altimeter setting and increase all DA 51 feet and all MDA 60 feet; increase LNAV/VNAV all Cals visibility ½ mile. Baro-VNAV and VDP NA when using Colonel James Jabara altimeter setting.

MISSED APPROACH:
Climb to 3100 direct BSHWD and hold.

AWOS-3P 120.875	WICHITA APP CON 134.8 269.1	UNICOM 122.8 (CTAF)
---------------------------	---------------------------------------	-------------------------------

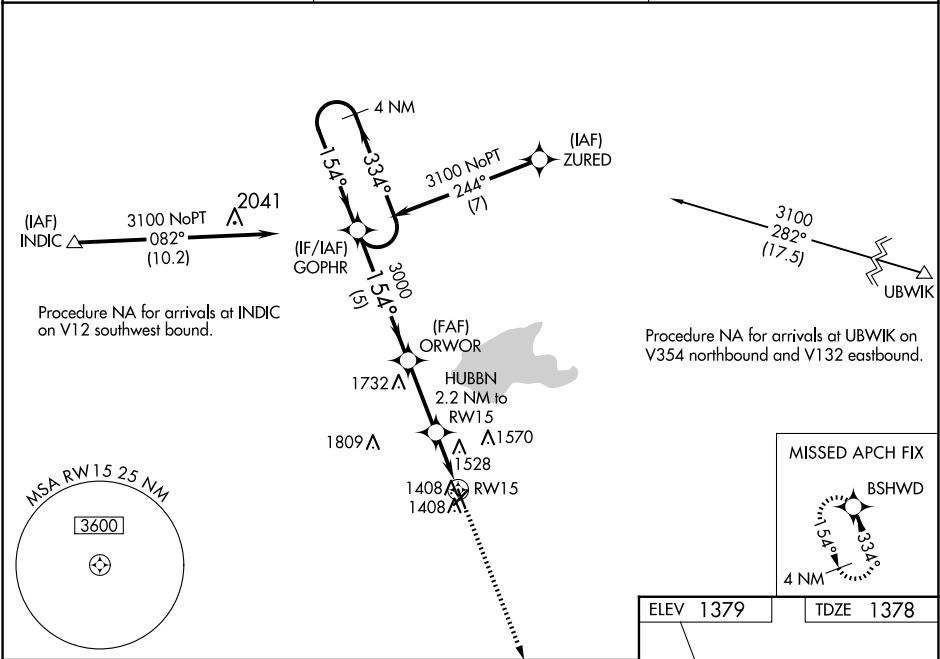

4 NM Holding Pattern		GOPHR		ORWOR		HUBBN 2.2 NM to RW15		3100 BSHW *LNAV only	
3100	←334° 154°→	154°		3000		*1.2 NM to RW15		RW15	
GP 3.00° TCH 40		5 NM		2.8 NM		1 NM		1.2 NM	
CATEGORY		A	B	C	D				
LPV DA		1628-1	250 (300-1)			NA			
LNAV/VNAV DA		1843-1½	465 (500-1½)			NA			
LNAV MDA		1780-1	402 (500-1)			NA			
CIRCLING		1820-1 441 (500-1)	1960-1 581 (600-1)			NA			

