

WAAS
CH **97434**
W22A

APP CRS
218°

Rwy Idg
TDZE **1378**
Apt Elev **1379**

RNAV (GPS) RWY 22

EL DORADO/CAPT JACK THOMAS MEML (EQA)


▼

⚠ NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Colonel James Jabara altimeter setting and increase all DA 51 feet and all MDA 60 feet; increase LNAV/VNAV all Cats visibility ½ mile. Baro-VNAV and VDP NA when using Colonel James Jabara altimeter setting.

MISSED APPROACH:
Climb to 3000 direct CERVK and hold.

AWOS-3P 120.875	WICHITA APP CON 134.8 269.1	UNICOM 122.8 (CTAF) 0
---------------------------	---------------------------------------	---------------------------------

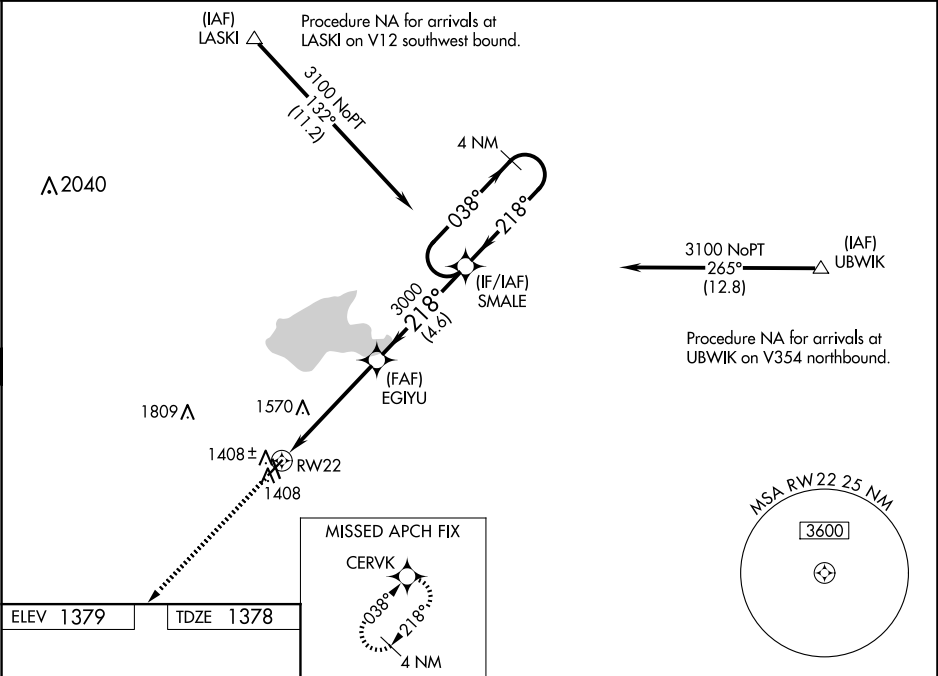

3000 CERVK		SMALE 4 NM Holding Pattern			
*LNAV only		EGIYU 3000			
*1.5 NM to RW22		038° → 3100			
RW22		← 218°			
1.5		3.5 NM		4.6 NM	
CATEGORY		A	B	C	D
LPV DA		1578-1	200 (200-1)	NA	
LNAV/VNAV DA		1671-1	293 (300-1)	NA	
LNAV MDA		1900-1	522 (600-1)	NA	
CIRCLING		1900-1 521 (600-1)	1960-1 581 (600-1)	NA	