

WAAS CH 90326 W34A	APP CRS 344°	Rwy Idg 3502 TDZE 1279 Apt Elev 1279
--	------------------------	---


RNAV (GPS) RWY 34
FOSSON MUNI/ANDERSON FLD (FSE)

RNP APCH.

T VDP NA when using Thief River Falls altimeter setting. When local altimeter setting not
A received, use Thief River Falls altimeter setting and increase all MDA 100 feet and increase
 LP and LNAV Cat C visibility $\frac{3}{8}$ SM, and increase Circling Cat C visibility $\frac{1}{2}$ SM.

MISSED APPROACH:
Climb to 4000 direct
ZOBON and hold.

AWOS-3 118.35	MINNEAPOLIS CENTER 134.75 251.1	GCO 121.725	CTAF 122.9
-------------------------	---	-----------------------	----------------------

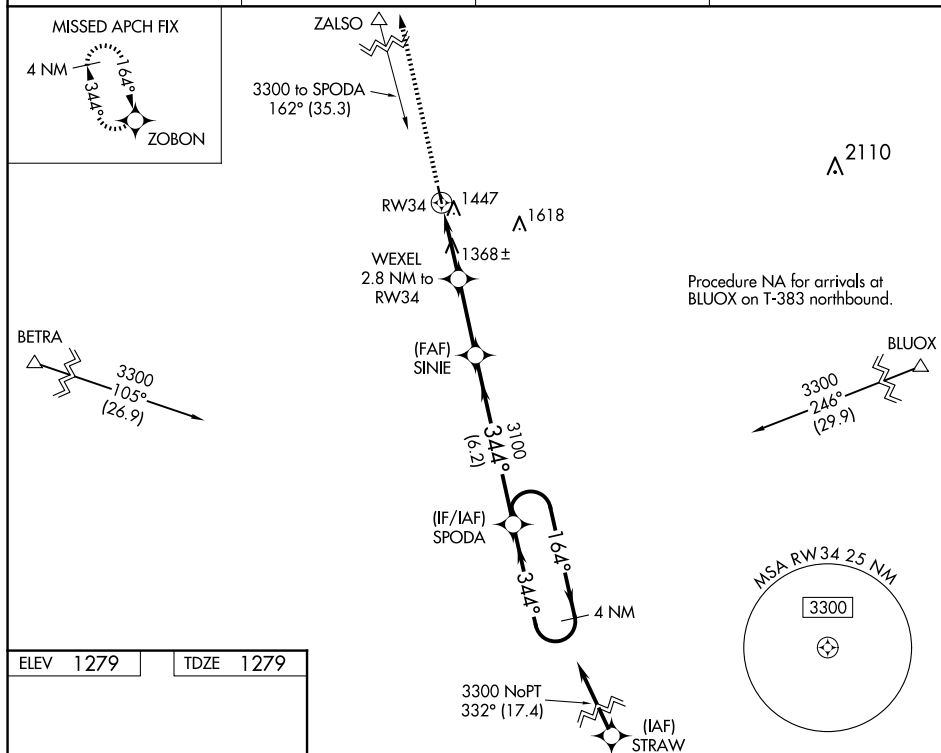

3400 X 75
0.4% Up
344°
4 NM Holding Pattern

3400
344°
3300
164°
344°

WEXEL 2.8 NM to RW34
SINIE
SPODA
RW34
1.1 NM to RW34
1.7 NM
2.8 NM
6.2 NM
3100
2200
3.00°
TCH 40

CATEGORY	A	B	C	D
LP MDA	1620-1	341 (400-1)		NA
LNAV MDA	1760-1	481 (500-1)	1760-1 ³ / ₈ 481 (500-1 ³ / ₈)	NA
CIRCLING	1860-1	581 (600-1)	1860-1 ¹ / ₂ 581 (600-1 ¹ / ₂)	NA

MIRL Rwy 16-34
REIL Rws 16 and 34

