
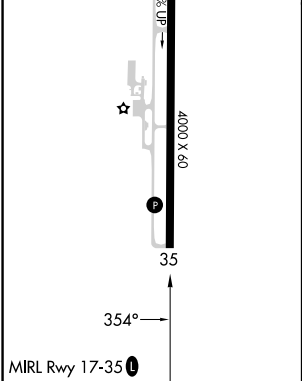


APP CRS	Rwy Idg	4000
354°	TDZE	984
	Apf Elev	985

RNAV (GPS) RWY 35
CHANDLER RGNL (CQB)

RNP APCH.	MISSED APPROACH: Climb to 2600 direct CADUT and hold.
When local altimeter setting not received, use Shawnee altimeter setting and increase all MDA 80 feet; increase LNAV Cat C visibility 1/8 SM. VDP NA with Shawnee Rgnl altimeter setting.	

AWOS-3PT 119.275	KANSAS CITY CENTER 127.8 319.1	CTAF 122.9
---------------------	-----------------------------------	---------------

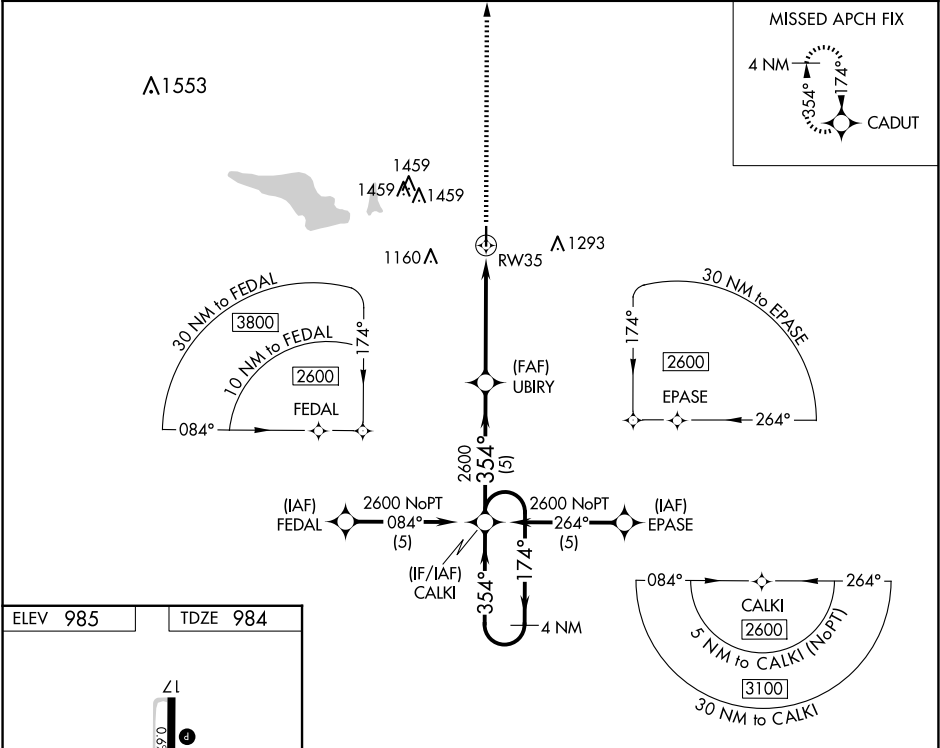

2600	CADUT	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 42).	
*LNAV only.		UBIRY	CALKI
*1.1 NM to RW35		4 NM Holding Pattern	2600
RW35		354°	174°
1.1		3.8 NM	5 NM
CATEGORY	A	B	C
GLS PA DA	NA		
LNAV/VNAV	DA	NA	
LNAV MDA	1320-1	335 (400-1)	NA