WAAS CH 63135 W32A	APP CRS 323°	Rwy ldg 4400 TDZE 1800 Apt Elev 1800

RNAV (GPS) RWY 32
SMITH CENTER MUNI (K82)

RNP APCH - GPS.

⚠ Baro-VNAV and VDP NA when using CNK altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. When local altimeter setting not received, use CNK altimeter setting: increase LPV DA to 2174 feet; increase LNAV/VNAV DA to 2224 feet and all visibilities ¼ SM; increase all MDAs 180 feet, and Circling all visibilities ½ SM.

MISSED APPROACH: Climb to 3900 direct LAYIP and hold.

AWOS-3PT	MINNEAPOLIS CENTER	UNICOM
118.45	119.4 278.8	122.8 (CTAF) L

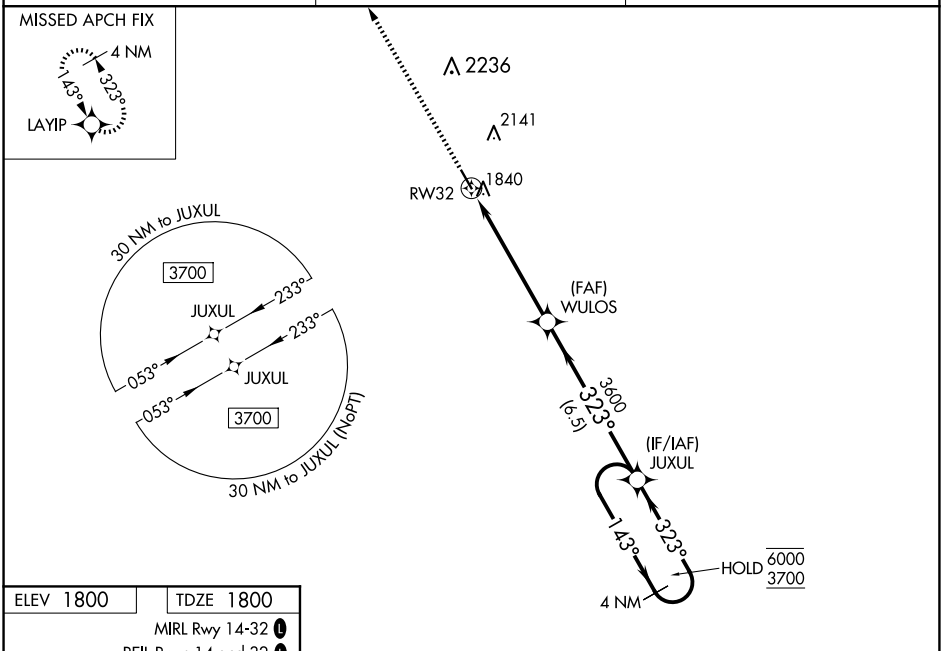

ELEV 1800 TDZE 1800

MIRL Rwy 14-32 L

REIL Rwys 14 and 32 L

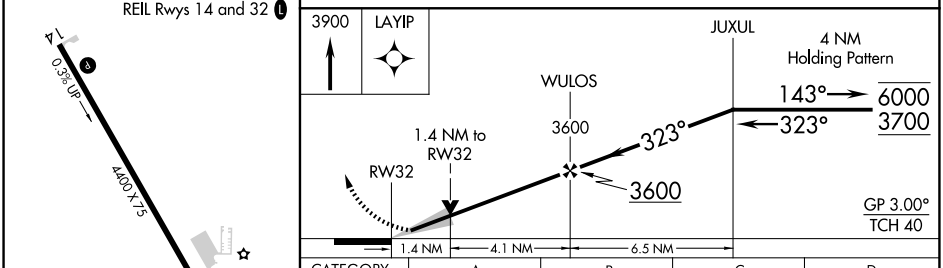

CATEGORY	A	B	C	D
LPV DA	2000-1 200 (200-1)		NA	
LNAV/VNAV DA	2050-1 250 (300-1)		NA	
LNAV MDA	2300-1 500 (500-1)		NA	
C CIRCLING	2480-1 680 (700-1)	2580-1 780 (800-1)	NA	

NC-2, 02 OCT 2025 to 30 OCT 2025