

WAAS CH 53719 W02A	APP CRS 022°	Rwy Ldg TDZE Apt Elev	4400 1068 1068
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 2

GRIMES FLD (I74)

RNP APCH.


▼

Baro-VNAV and VDP NA when using Springfield altimeter setting. Rwy 2 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Springfield altimeter setting and increase all DAs 44 feet, all MDAs 60 feet, increase LNAV/VNAV all Cats visibility ¼ SM, and increase Circling Cat C visibility ¼ SM. Circling NA to Rwy 1 and 19.

MISSED APPROACH:

Climb to 3000 direct HIRID and hold.

AWOS-3 118.325	COLUMBUS APP CON 134.45 294.5	UNICOM 122.7 (CTAF) 0
--------------------------	---	---------------------------------

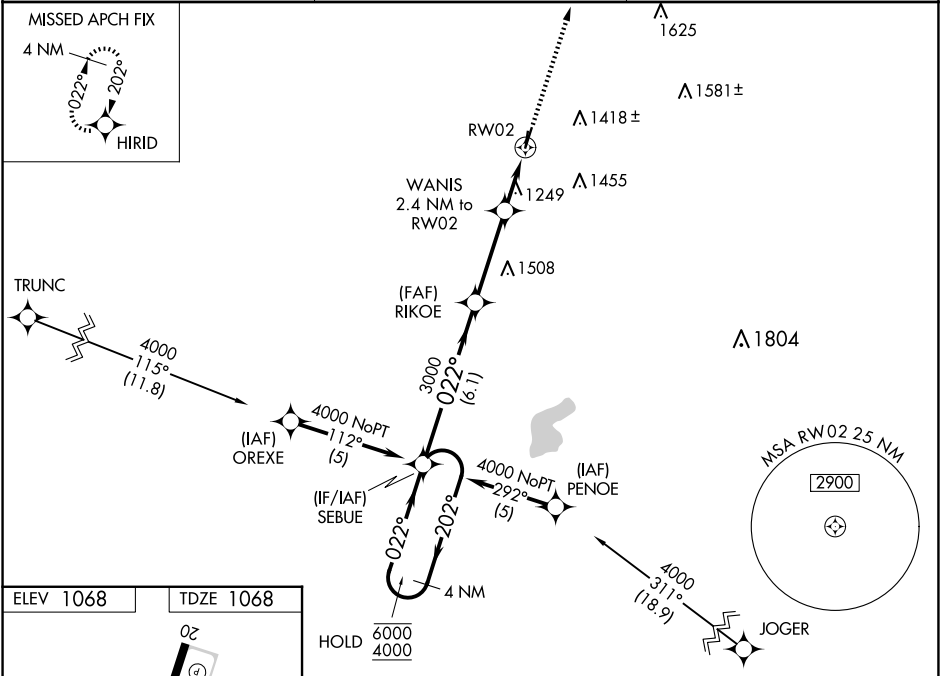

4 NM Holding Pattern		SEBUE		RIKOE		*LNAV only.		3000		HIRID	
6000 ← 202°		022° →		022°		3000		WANIS 2.4 NM to RW02		↑	
4000						*1860		*1.3 NM to RW02		★	
GP 3.00° TCH 44		6.1 NM		3.5 NM		1.1		1.3		RW02	
CATEGORY		A		B		C		D			
LPV DA		1318-1		250 (300-1)						NA	
LNAV/ VNAV DA		1501-1½		433 (500-1½)						NA	
LNAV MDA		1500-1		432 (500-1)		1500-1¼ 432 (500-1¼)				NA	
CIRCLING		1580-1 512 (600-1)		1780-1 712 (800-1)		1800-2 732 (800-2)				NA	